



Design Modelling Report

Apsley Flood Investigation

West Wimmera Shire Council

4 June 2026



Document Status

Version	Doc type	Reviewed by	Approved by	Date issued
01	Draft	Ben Hughes	Ben Hughes	28/02/2025
02	Final	Ben Hughes	Ben Hughes	04/06/2026

Project Details

Project Name	Apsley Flood Investigation
Client	West Wimmera Shire Council
Client Project Manager	Edwin Irvine
Water Technology Project Manager	Vitaly Leschen
Water Technology Project Director	Ben Hughes
Authors	Vitaly Leschen, Jean Yong
Document Number	24010090 R02B_V02_Apsley_DesignModellingReport.docx



COPYRIGHT

Water Technology Pty Ltd has produced this document in accordance with instructions from West Wimmera Shire Council for their use only. The concepts and information contained in this document are the copyright of Water Technology Pty Ltd. Use or copying of this document in whole or in part without written permission of Water Technology Pty Ltd constitutes an infringement of copyright.

Water Technology Pty Ltd does not warrant this document is definitive nor free from error and does not accept liability for any loss caused, or arising from, reliance upon the information provided herein.

First Floor, 40 Rowan Street
Wangaratta VIC 3677
Telephone (03) 5721 2650
ACN 093 377 283
ABN 60 093 377 283





ACKNOWLEDGEMENT OF COUNTRY

The Board and employees of Water Technology acknowledge and respect the Aboriginal and Torres Strait Islander Peoples as the Traditional Custodians of Country throughout Australia. We specifically acknowledge the Traditional Custodians of the land on which our offices reside and where we undertake our work.

We respect the knowledge, skills and lived experiences of Aboriginal and Torres Strait Islander Peoples, who we continue to learn from and collaborate with. We also extend our respect to all First Nations Peoples, their cultures and to their Elders, past and present.



Artwork by Maurice Goolagong 2023. This piece was commissioned by Water Technology and visualises the important connections we have to water, and the cultural significance of journeys taken by traditional custodians of our land to meeting places, where communities connect with each other around waterways.

The symbolism in the artwork includes:

- Seven circles representing each of the States and Territories in Australia where we do our work
- Blue dots between each circle representing the waterways that connect us
- The animals that rely on healthy waterways for their home
- Black and white dots representing all the different communities that we visit in our work
- Hands that are for the people we help on our journey



4 June 2026

Edwin Irvine
Senior Planning Officer
West Wimmera Shire Council
49 Elizabeth St, Edenhope VIC 3318

Via email: EdwinIrvine@westwimmera.vic.gov.au

Dear Edwin

Apsley Flood Investigation

Please see the attached Design Modelling Report for the Apsley Flood Investigation. This report documents the following:

- Draft flood mapping for 10% and 1% AEP flood events.
- Model sensitivity testing.

Upon approval of the draft modelling, the remaining design modelling will be undertaken.

Yours sincerely

Vitaly Leschen
Project Engineer
Vitaly.Leschen@watertech.com.au
WATER TECHNOLOGY PTY LTD



CONTENTS

GLOSSARY	6
1 INTRODUCTION	8
1.1 Overview	8
1.2 Study Area	8
2 HYDRAULIC DESIGN MODELLING	11
2.1 Model Extent and Structure	11
2.2 Model Topography	13
2.3 Model Roughness	15
2.4 Model Structure	17
2.5 Initial Water Level	19
2.6 Design Rainfall and Losses	23
2.6.1 IFD design rainfall depths	23
2.6.2 Temporal patterns	24
3 SENSITIVITY ANALYSIS	25
3.1 Initial Water Level	25
3.2 Rainfall Losses and Pre-burst	32
3.3 Roughness coefficients	37
3.4 Critical Storm Duration	42
3.5 Adopted Parameters for Design Modelling	42
4 DRAFT FLOOD MODELLING	43
4.1 Overview	43
4.2 Existing Conditions	43
5 SUMMARY AND DISCUSSION	54

LIST OF FIGURES

Figure 1-1	Apsley with respect to western Victoria	9
Figure 1-2	Apsley study area	10
Figure 2-1	Model Schematic - Apsley	12
Figure 2-2	Model Topography Methodology	13
Figure 2-3	Apsley Catchment and Topography	14
Figure 2-4	Apsley – Model Roughness	16
Figure 2-5	Apsley Modelled Structure	18
Figure 2-6	DEA Water Observation – 1% Return Frequency	20
Figure 2-7	DEA Wetness Percentile – 10 th , 50 th and 90 th for Water Bodies	21
Figure 2-8	Comparison of Datasets	22
Figure 3-1	Difference Plot for 1% AEP – Base Case vs 10% Initial Water Level	26
Figure 3-2	Difference Plot for 10% AEP - Base Case vs 10% Initial Water Level	27
Figure 3-3	Difference Plot for 1% AEP – Base Case vs 50% Initial Water Level	28
Figure 3-4	Difference Plot for 10% AEP - Base Case vs 50% Initial Water Level	29



Figure 3-5	Difference Plot for 1% AEP - Base Case vs 99% Initial Water Level	30
Figure 3-6	Difference Plot for 10% AEP - Base Case vs 99% Initial Water Level	31
Figure 3-7	Difference Plot for 1% AEP – Base Case vs 10th Percentile Pre-burst	33
Figure 3-8	Difference Plot for 10% AEP – Base Case vs 10th Percentile Pre-burst	34
Figure 3-9	Difference Plot for 1% AEP – Base Case vs 50th Percentile Pre-burst	35
Figure 3-10	Difference Plot for 10% AEP – Base Case vs 50th Percentile Pre-burst	36
Figure 3-11	Difference Plot for 1% AEP - Base Case vs factor of 0.8 Roughness Value	38
Figure 3-12	Difference Plot for 10% AEP - Base Case vs factor of 0.8 Roughness Value	39
Figure 3-13	Difference Plot for 1% AEP - Base Case vs factor of 1.2 Roughness Value	40
Figure 3-14	Difference Plot for 10% AEP - Base Case vs factor of 1.2 Roughness Value	41
Figure 4-1	Flood hazard classifications	43
Figure 4-2	Zoomed into Apsley - 10% and 1% AEP flood events	44
Figure 4-3	Broad extent – 10% and 1% AEP flood events	45
Figure 4-4	Zoomed into Apsley – 1% flood depth	46
Figure 4-5	Broad extent - 1% flood depth with water surface elevation contours	47
Figure 4-6	Zoomed into Apsley – 1% flood hazard	48
Figure 4-7	Broad extent - 1% flood hazard	49
Figure 4-8	Zoomed into Apsley – 10% flood depth	50
Figure 4-9	Broad extent - 10% flood depth with water surface elevation contours	51
Figure 4-10	Zoomed into Apsley – 10% flood hazard	52
Figure 4-11	Broad extent - 10% flood hazard	53

LIST OF TABLES

Table 2-1	Land Use Manning's 'n' Roughness values	15
Table 2-2	IFD design rainfall depth (mm) – Township Catchment (No ARF)	23
Table 2-3	IFD design rainfall depth (mm) – Riverine Catchment (with ARF)	23
Table 2-4	1% AEP analysed durations and temporal patterns	24
Table 3-1	Selected short, mid, long critical durations	42
Table 3-2	Finalised critical durations at key catchment locations	42



GLOSSARY

Annual Exceedance Probability (AEP)	Refers to the probability or risk of a flood of a given size occurring or being exceeded in any given year. A 90% AEP flood has a high probability of occurring or being exceeded; it would occur quite often and would be relatively small. A 1% AEP flood has a low probability of occurrence or being exceeded; it would be fairly rare but it would be of extreme magnitude.
Australian Height Datum (AHD)	A common national surface level datum approximately corresponding to mean sea level. Introduced in 1971 to eventually supersede all earlier datums.
Average Recurrence Interval (ARI)	Refers to the average time interval between a given flood magnitude occurring or being exceeded. A 10 year ARI flood is expected to be exceeded on average once every 10 years. A 100 year ARI flood is expected to be exceeded on average once every 100 years. The AEP is the ARI expressed as a percentage.
Cadastre, cadastral base	Information in map or digital form showing the extent and usage of land, including streets, lot boundaries, water courses etc.
Catchment	The area draining to a site. It always relates to a particular location and may include the catchments of tributary streams as well as the main stream.
Design flood	A design flood is a probabilistic or statistical estimate, being generally based on some form of probability analysis of flood or rainfall data. An average recurrence interval or exceedance probability is attributed to the estimate.
Discharge	The rate of flow of water measured in terms of volume over time. It is to be distinguished from the speed or velocity of flow, which is a measure of how fast the water is moving rather than how much is moving.
Flood	Relatively high stream flow which overtops the natural or artificial banks in any part of a stream, river, estuary, lake or dam, and/or overland runoff before entering a watercourse and/or coastal inundation resulting from elevated sea levels and/or waves overtopping coastline defences.
Flood frequency analysis	A statistical analysis of observed flood magnitudes to determine the probability of a given flood magnitude.
Flood hazard	Potential risk to life and limb caused by flooding. Flood hazard combines the flood depth and velocity.
Floodplain	Area of land which is subject to inundation by floods up to the probable maximum flood event, i.e. flood prone land.
Flood storages	Those parts of the floodplain that are important for the temporary storage, of floodwaters during the passage of a flood.



Geographical information systems (GIS)	A system of software and procedures designed to support the management, manipulation, analysis and display of spatially referenced data.
Hydraulics	The term given to the study of water flow in a river, channel or pipe, in particular, the evaluation of flow parameters such as stage and velocity.
Hydrograph	A graph that shows how the discharge changes with time at any particular location.
Hydrology	The term given to the study of the rainfall and runoff process as it relates to the derivation of hydrographs for given floods.
Intensity frequency duration (IFD) analysis	Statistical analysis of rainfall, describing the rainfall intensity (mm/hr), frequency (probability measured by the AEP), duration (hrs). This analysis is used to generate design rainfall estimates.
LiDAR	Spot land surface heights collected via aerial light detection and ranging (LiDAR) survey. The spot heights are converted to a gridded digital elevation model dataset for use in modelling and mapping.
Peak flow	The maximum discharge occurring during a flood event.
Probability	A statistical measure of the expected frequency or occurrence of flooding. For a fuller explanation see Average Recurrence Interval.
Probable Maximum Flood	The flood that may be expected from the most severe combination of critical meteorological and hydrologic conditions that are reasonably possible in a particular drainage area.
RORB	A hydrological modelling tool used in this study to calculate the runoff generated from historic and design rainfall events.
Runoff	The amount of rainfall that actually ends up as stream or pipe flow, also known as rainfall excess.
Stage	Equivalent to 'water level'. Both are measured with reference to a specified datum.
Stage hydrograph	A graph that shows how the water level changes with time. It must be referenced to a particular location and datum.
Topography	A surface which defines the ground level of a chosen area.



1 INTRODUCTION

1.1 Overview

Water Technology was commissioned by West Wimmera Shire Council to undertake the Apsley Flood Investigation. Apsley is within West Wimmera Shire Council, located in Victoria's Wimmera region approximately 100 km southwest of Horsham. Apsley is also within the Wimmera Catchment Management Authority (CMA) management area and the Millicent Coast basin. Apsley is located 20 km west of Edenhope and has around 300 residents.

Apsley known to be prone to stormwater flood events, with events recorded in 1971, 1973, 1975, 1981, 1991, 1993, 2011, 2016 and 2022. Apsley is impacted by local waterways and drainage lines flowing towards Newlands Lake west of the township.

There is no current flood study for Apsley, and current flood risk information is based on information from council, SES and the Wimmera Wetland Hydrology Investigation completed by Water Technology in 2019.

The study will produce reliable flood intelligence for use in emergency management situations, assess the current flood impact/exposure in terms of annual average damages caused by flooding in Apsley, investigate structural and non-structural mitigation options for each township. It will also produce planning scheme overlays for inclusion in the West Wimmera Shire Council planning scheme.

This report is one of a series documenting the outcomes of the Apsley Flood Investigation. Each reporting stage is shown below:

- R01 – Data Collation, Model Development and Calibration Report.
- **R02B – Design Modelling Report – This report.**
- R03B – Flood Intelligence Report & Municipal Flood Emergency Plan (MFEP) Documentation.
- R04B – Final Summary Report.

Note: Version A indicates Edenhope and version B indicates Apsley.

1.2 Study Area

Apsley is located within western Victoria. Its locations with respect to western Victoria are shown in Figure 1-1, with the study area for Apsley shown in Figure 1-2.

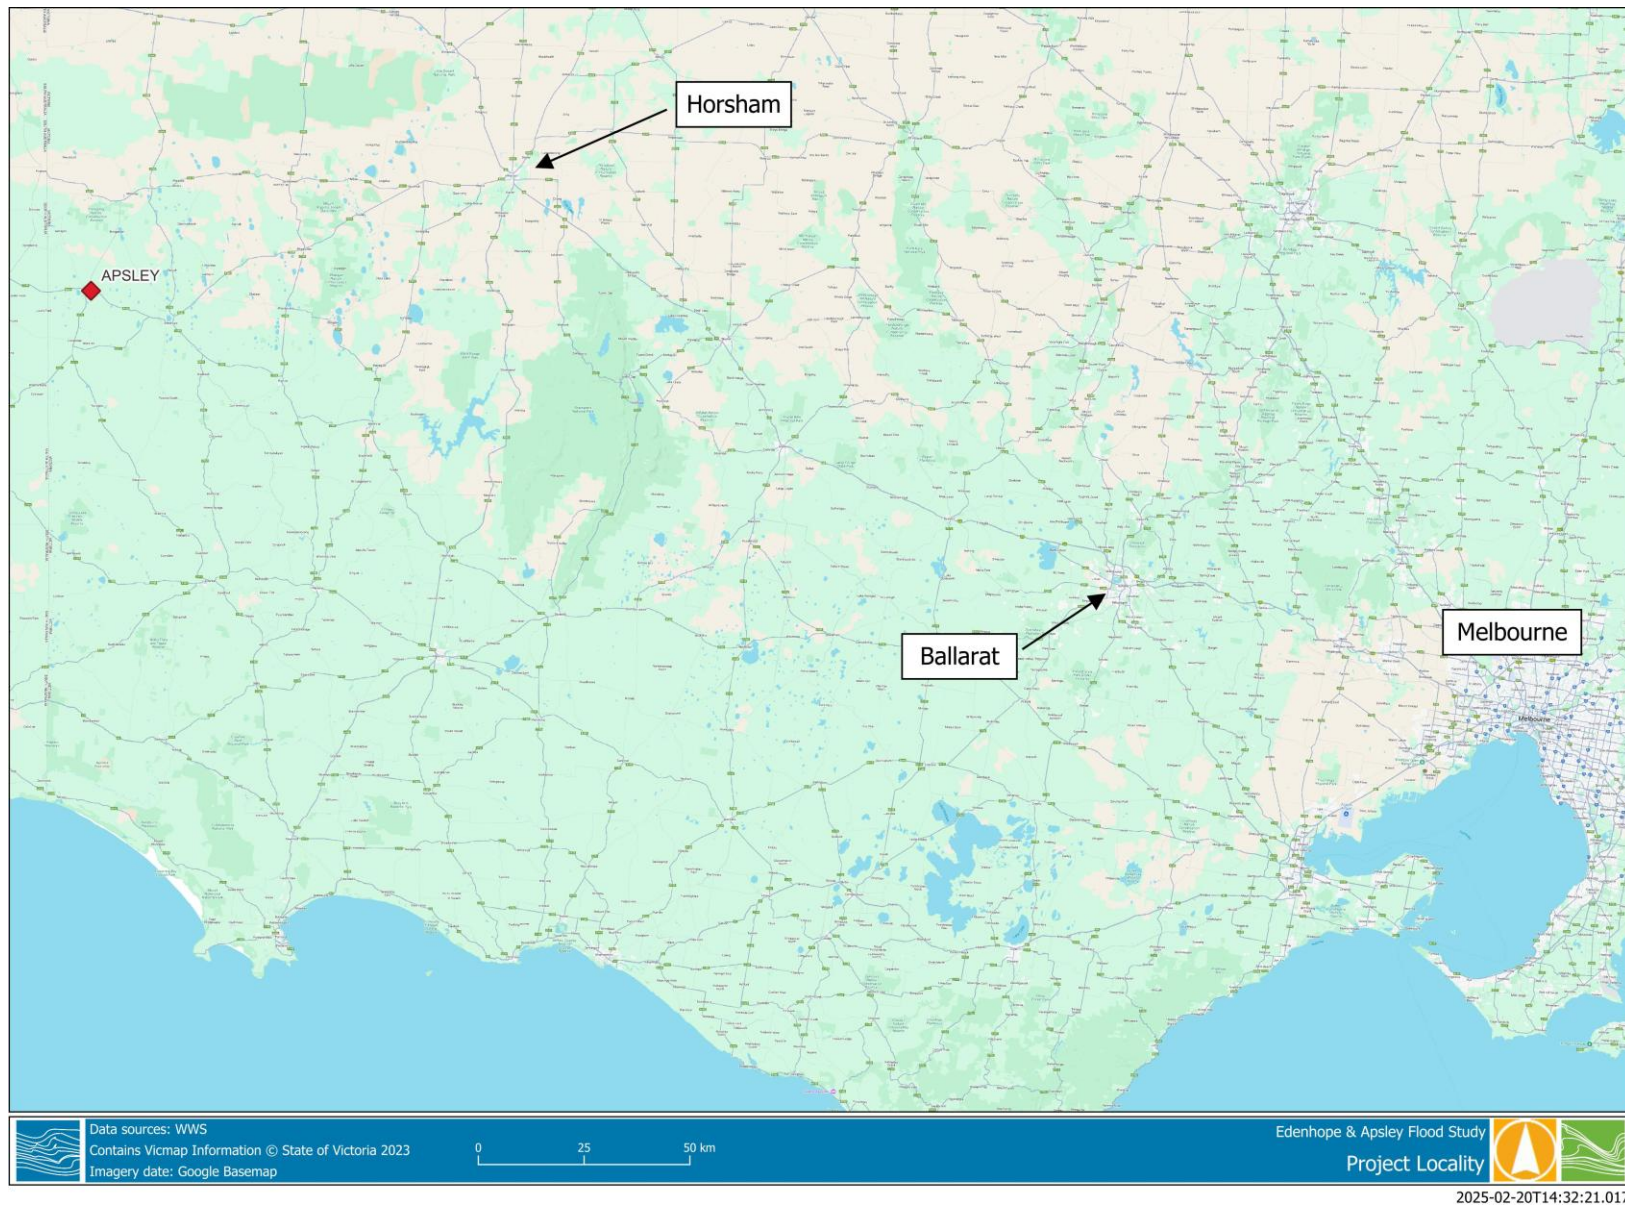


Figure 1-1 Apsley with respect to western Victoria

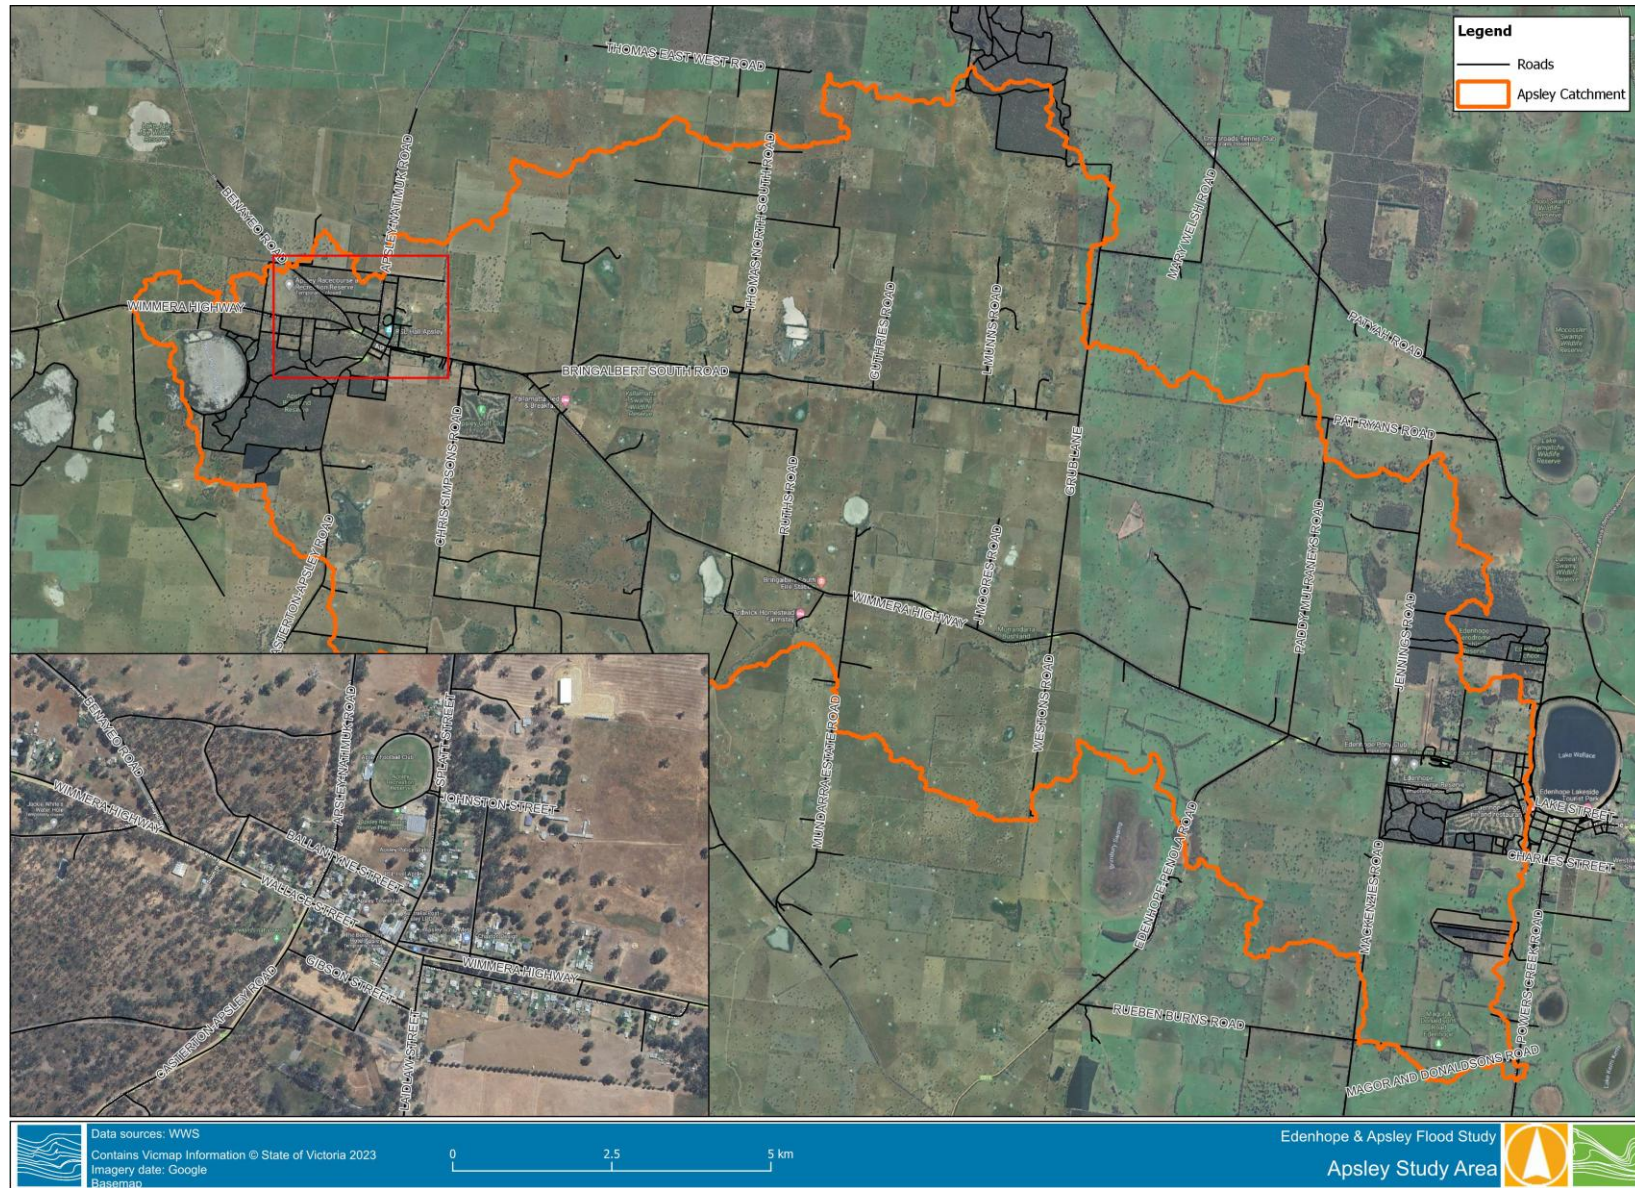


Figure 1-2 Apsley study area



2 HYDRAULIC DESIGN MODELLING

2.1 Model Extent and Structure

A 1D/2D TUFLOW model was developed for the study area, encompassing the catchment upstream of Apsley. The model extents were determined based on the topography, ensuring the entire upstream catchment was included.

The model was developed for use in the TUFLOW HPC hydraulic modelling software. The model topography was represented with a varying resolution (using Quadtree), with a cell size of 12 m outside of the township and 3 m within the township and local catchment. The ability for the resultant model grid to capture finer details was supported by Sub-Grid-Sampling (SGS) of the underlying topography datasets, which is based on detailed 2 m LiDAR.

The model adopted a Rain-on-Grid (RoG) approach to directly apply rainfall to the study area. This modelling approach will provide a better understanding of overland flow and drainage paths through the township and within its catchment. RoG was considered more appropriate than standard hydrologic models due to the complexities of the various upstream storages. As this investigation is for both township and riverine flooding, rainfall has been applied in two areas, varying the Areal Reduction Factor (ARF). The applied rainfall is further discussed in Section 2.6.

The model adopted an outflow boundary at the downstream extent, located downstream of Newlands Lake Reserve. The outflow boundaries adopted a water level vs flow (stage-discharge) curve calculated from the topography. The influence of these boundaries was controlled by the upstream lake and Apsley Bushland Reserve, farm dams and depressions located on farmlands, on the east side of the township.

The model schematic is presented in Figure 2-1.

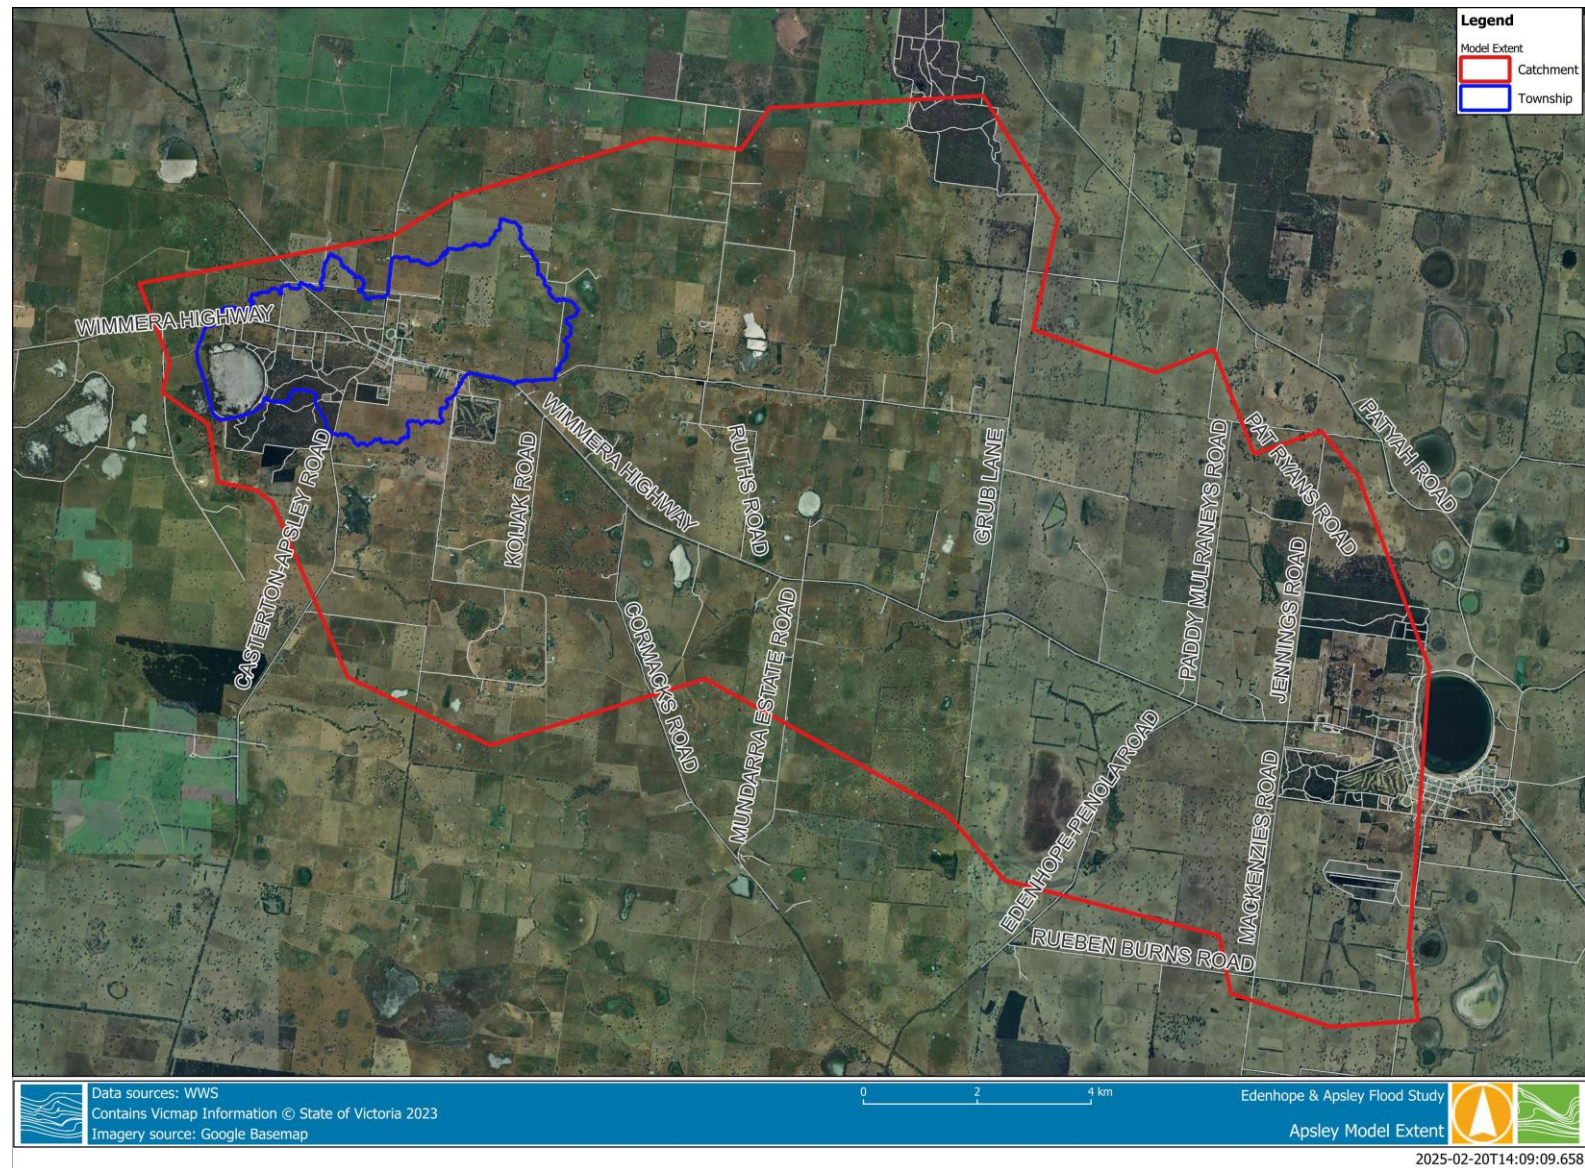


Figure 2-1 Model Schematic - Apsley



2.2 Model Topography

The model was primarily based upon the Wimmera CMA LiDAR dataset (2006). The Wimmera CMA LiDAR covered the entirety of the townships and most of their respective catchments. Areas not covered by the Wimmera CMA LiDAR adopted the VicMap 10m DEM. While the LiDAR was the primary source of topographic information, the model topography was further refined where more accurate or appropriate data was available. The main adjustment made to the LiDAR was the removal of water from storages or works known to have been undertaken. Figure 2-2 provides an overview of the model topography development.

The topography of the catchments was previously shown in Figure 2-2.

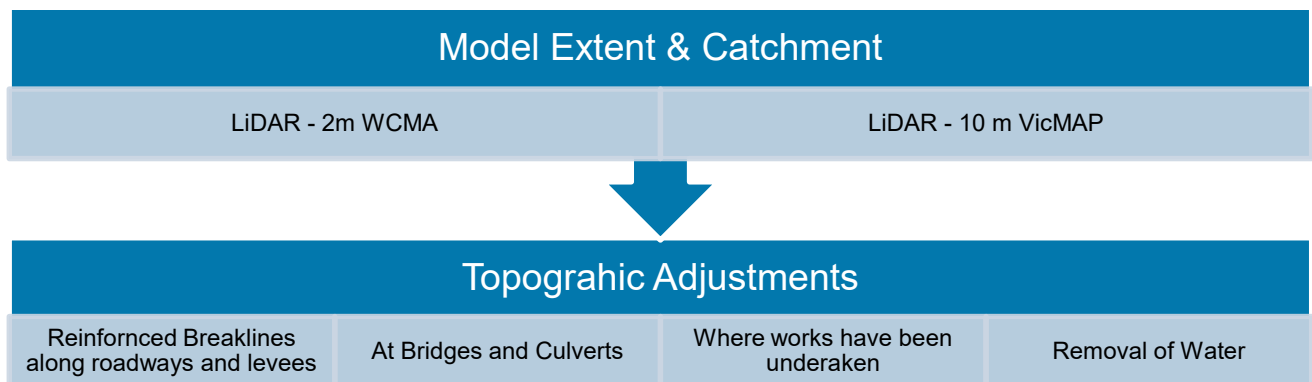


Figure 2-2 Model Topography Methodology

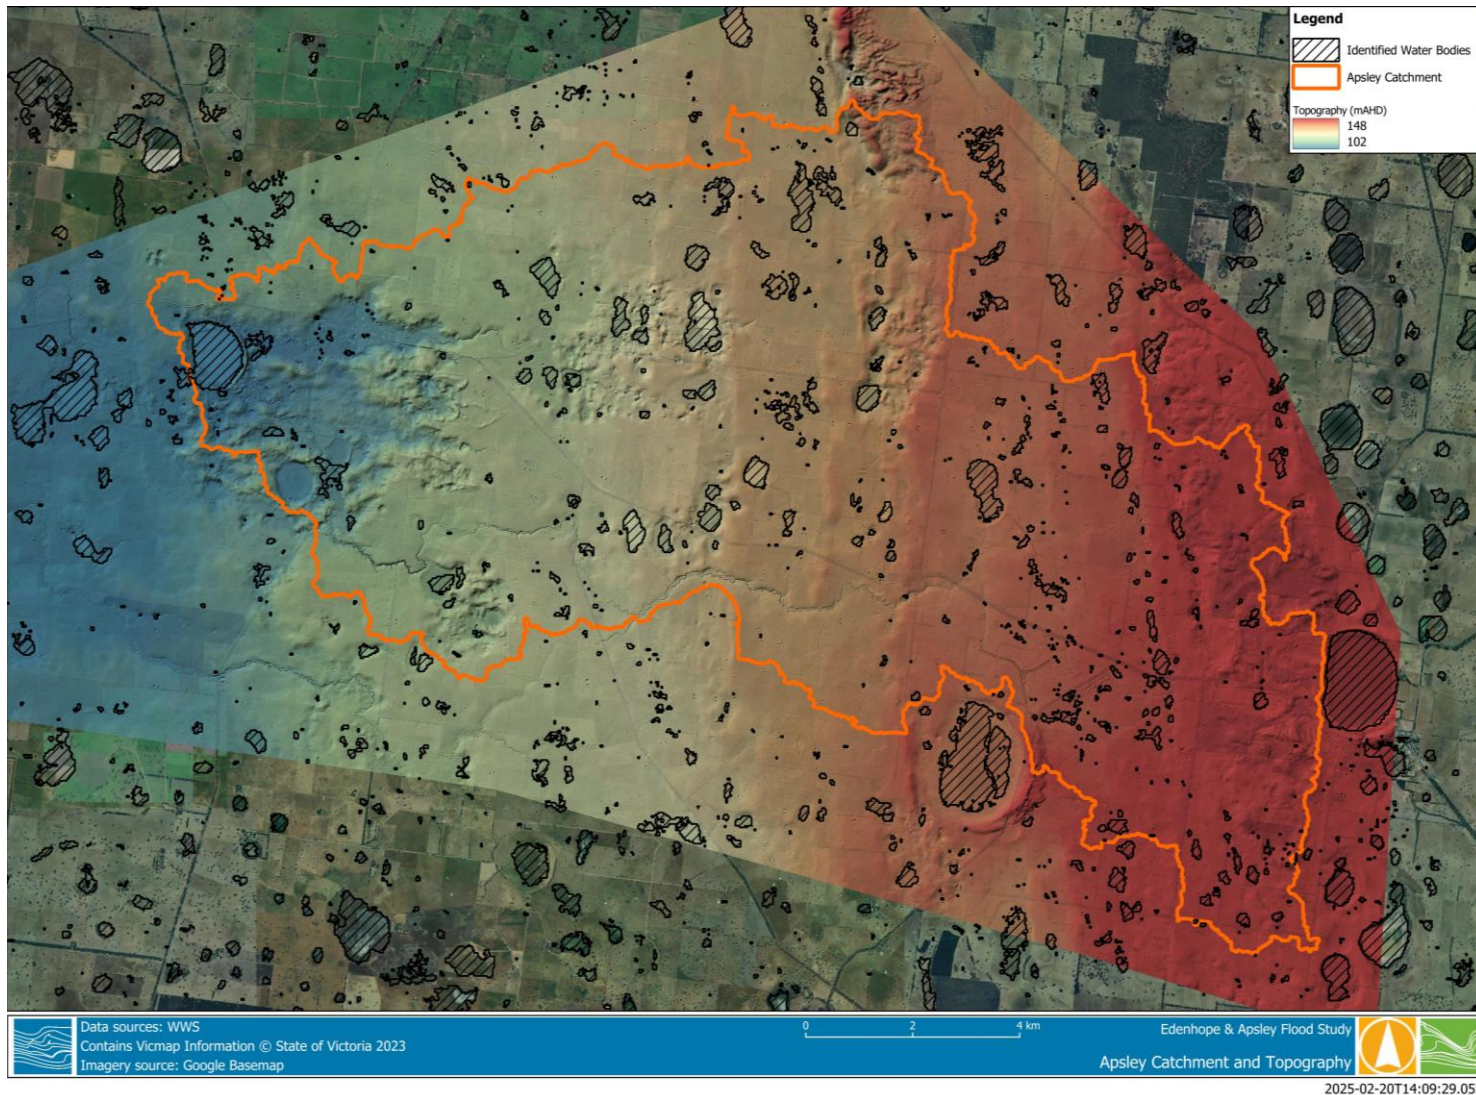


Figure 2-3 Apsley Catchment and Topography



2.3 Model Roughness

A key component of a hydraulic model is the land use types represented with a 2D materials layer, determining the Mannings 'n' roughness (surface resistance) for each part of the TUFLOW model. The roughness value varies between land uses. In general terms, a lower Manning's 'n' value represents a more efficient flow surface (e.g. a roadway), while a higher Manning's 'n' value represents a rougher and slower surface (e.g. dense vegetation). For this investigation, a roughness map was developed based upon aerial imagery. The adopted Manning's 'n' values are presented in Table 2-1 and shown spatially in Figure 2-4.

Table 2-1 Land Use Manning's 'n' Roughness values

Material	Manning's 'n' value
Rural Residential	0.1
Pasture	0.04
Dense Vegetation	0.095
Waterway Channel	0.03
Roadway (Paved)	0.025
Roadway (Unpaved)	0.035
Lake / Swamp / Wetland	0.05

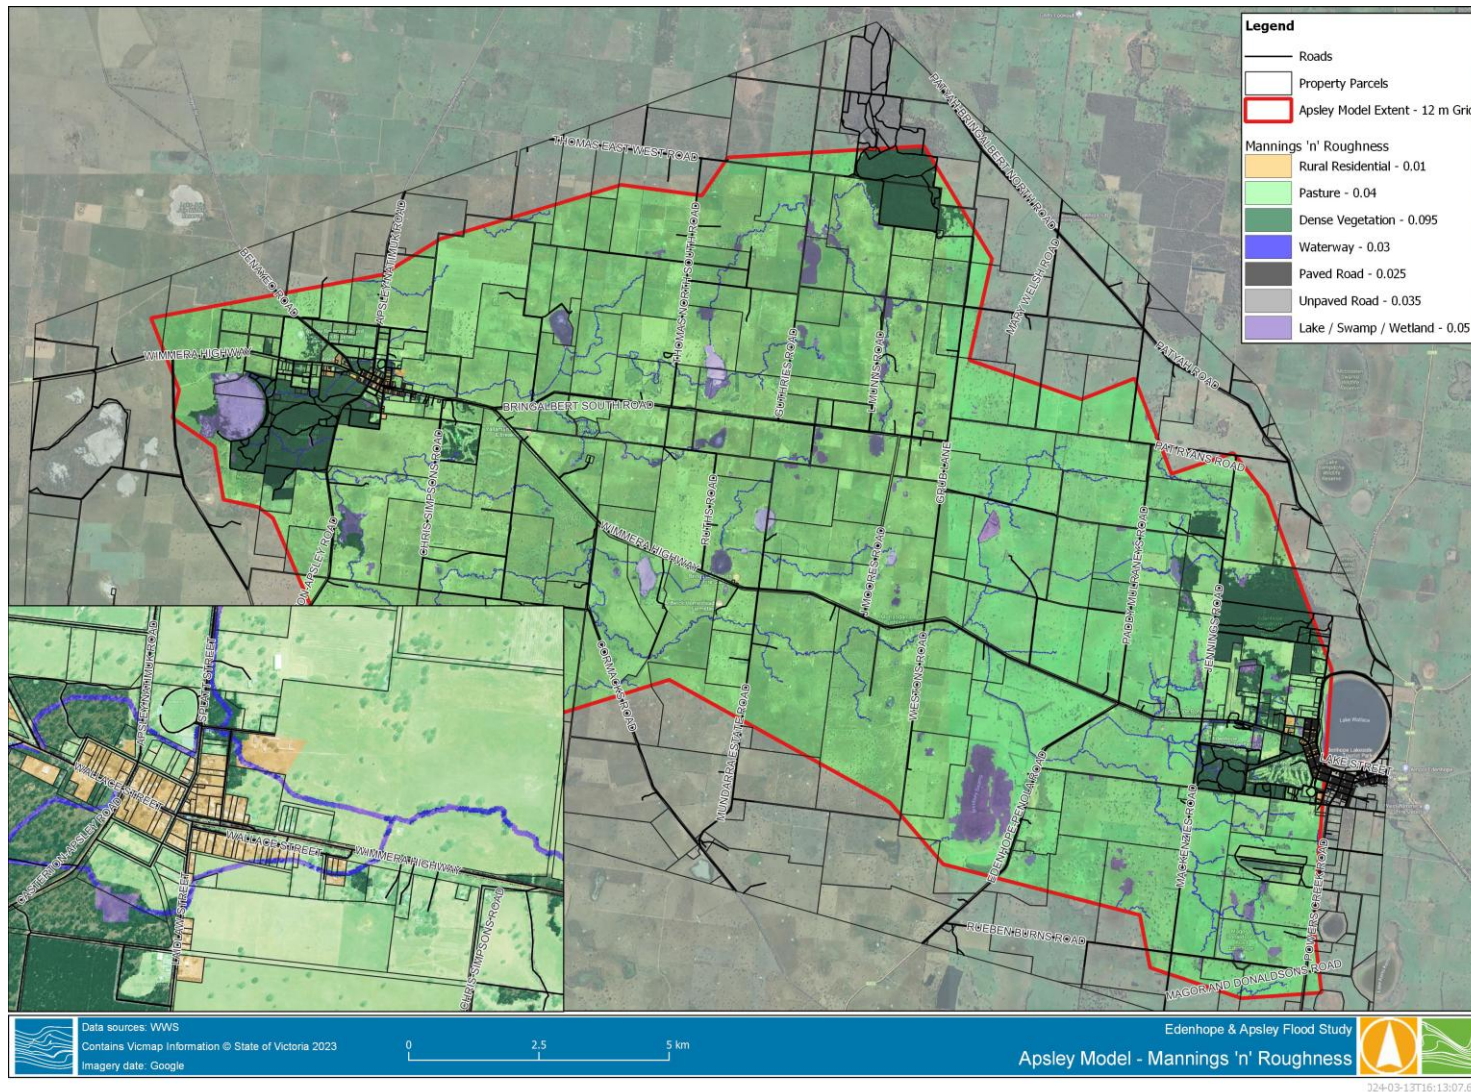


Figure 2-4 Aspley – Model Roughness



2.4 Model Structure

The drainage infrastructure in Apsley consists of open drains, pipes and pits. The major drainage network (pits and pipes) was provided by WWSC, with the invert levels estimated based on the topography, incorporating a standard cover. Additional culvert measurements were obtained during the site visit. In total, the Apsley model incorporated 42 pipes and 13 pits. Upstream of the township where flow paths intercepted roadways crossing was artificially removed to ensure connectivity, unless other information was known. The modelled (township) infrastructure is provided in Figure 2-5.



Figure 2-5 Apsley Modelled Structure



2.5 Initial Water Level

The Apsley catchment contains multiple depressions creating a series of swamps, wetlands and lakes all which provide significant catchment storage. Many of these depressions are ephemeral, only experiencing pooling water in periods of prolonged rainfall. The complex connectivity of these wetlands influences flood behaviour within the township.

The variation of catchment storage volume, vegetation and soil, has implications on flooding within the township and while flooding has the tendency to occur during wet conditions, there is always the potential for a rainfall event to occur during a dry period. Satellite imagery was used to provide an understanding of potential antecedent catchment conditions. The datasets used for the sensitivity analysis included:

- Digital Earth Australia (DEA) Water Observation Multi Year¹ – this dataset provided the frequency at which satellite imagery captured water within the various depressions. It was used to assess extreme conditions, adopting water where observations have occurred less than 1% of the time, as shown in Figure 2-6.
- DEA Wetness Percentiles² – this dataset provided 10th, 50th and 90th percentiles of “wetness” within the area. It was used as the basis of sensitivity analysis, with the three used to identify starting conditions within the depressions. The 90th percentile output is provided in Figure 2-7, noting that this output will be filtered to water bodies only.
 - Note, the DEA Water Observation dataset, could also be varied to capture initial conditions for a range of conditions. A comparison of the two datasets is provided in Figure 2-8. It demonstrates that the datasets reasonably align with one another.

It was expected that the initial conditions within the Apsley catchment would impact the flood mapping. To account for this uncertainty sensitivity analysis was undertaken and is further discussed in Section 3.1.

¹ <https://knowledge.dea.ga.gov.au/data/product/dea-water-observations-statistics-landsat/?tab=overview>

² <https://maps.dea.ga.gov.au/#share=s-mYmYKh57NcZV7nUN8vaV52ZNO5S>

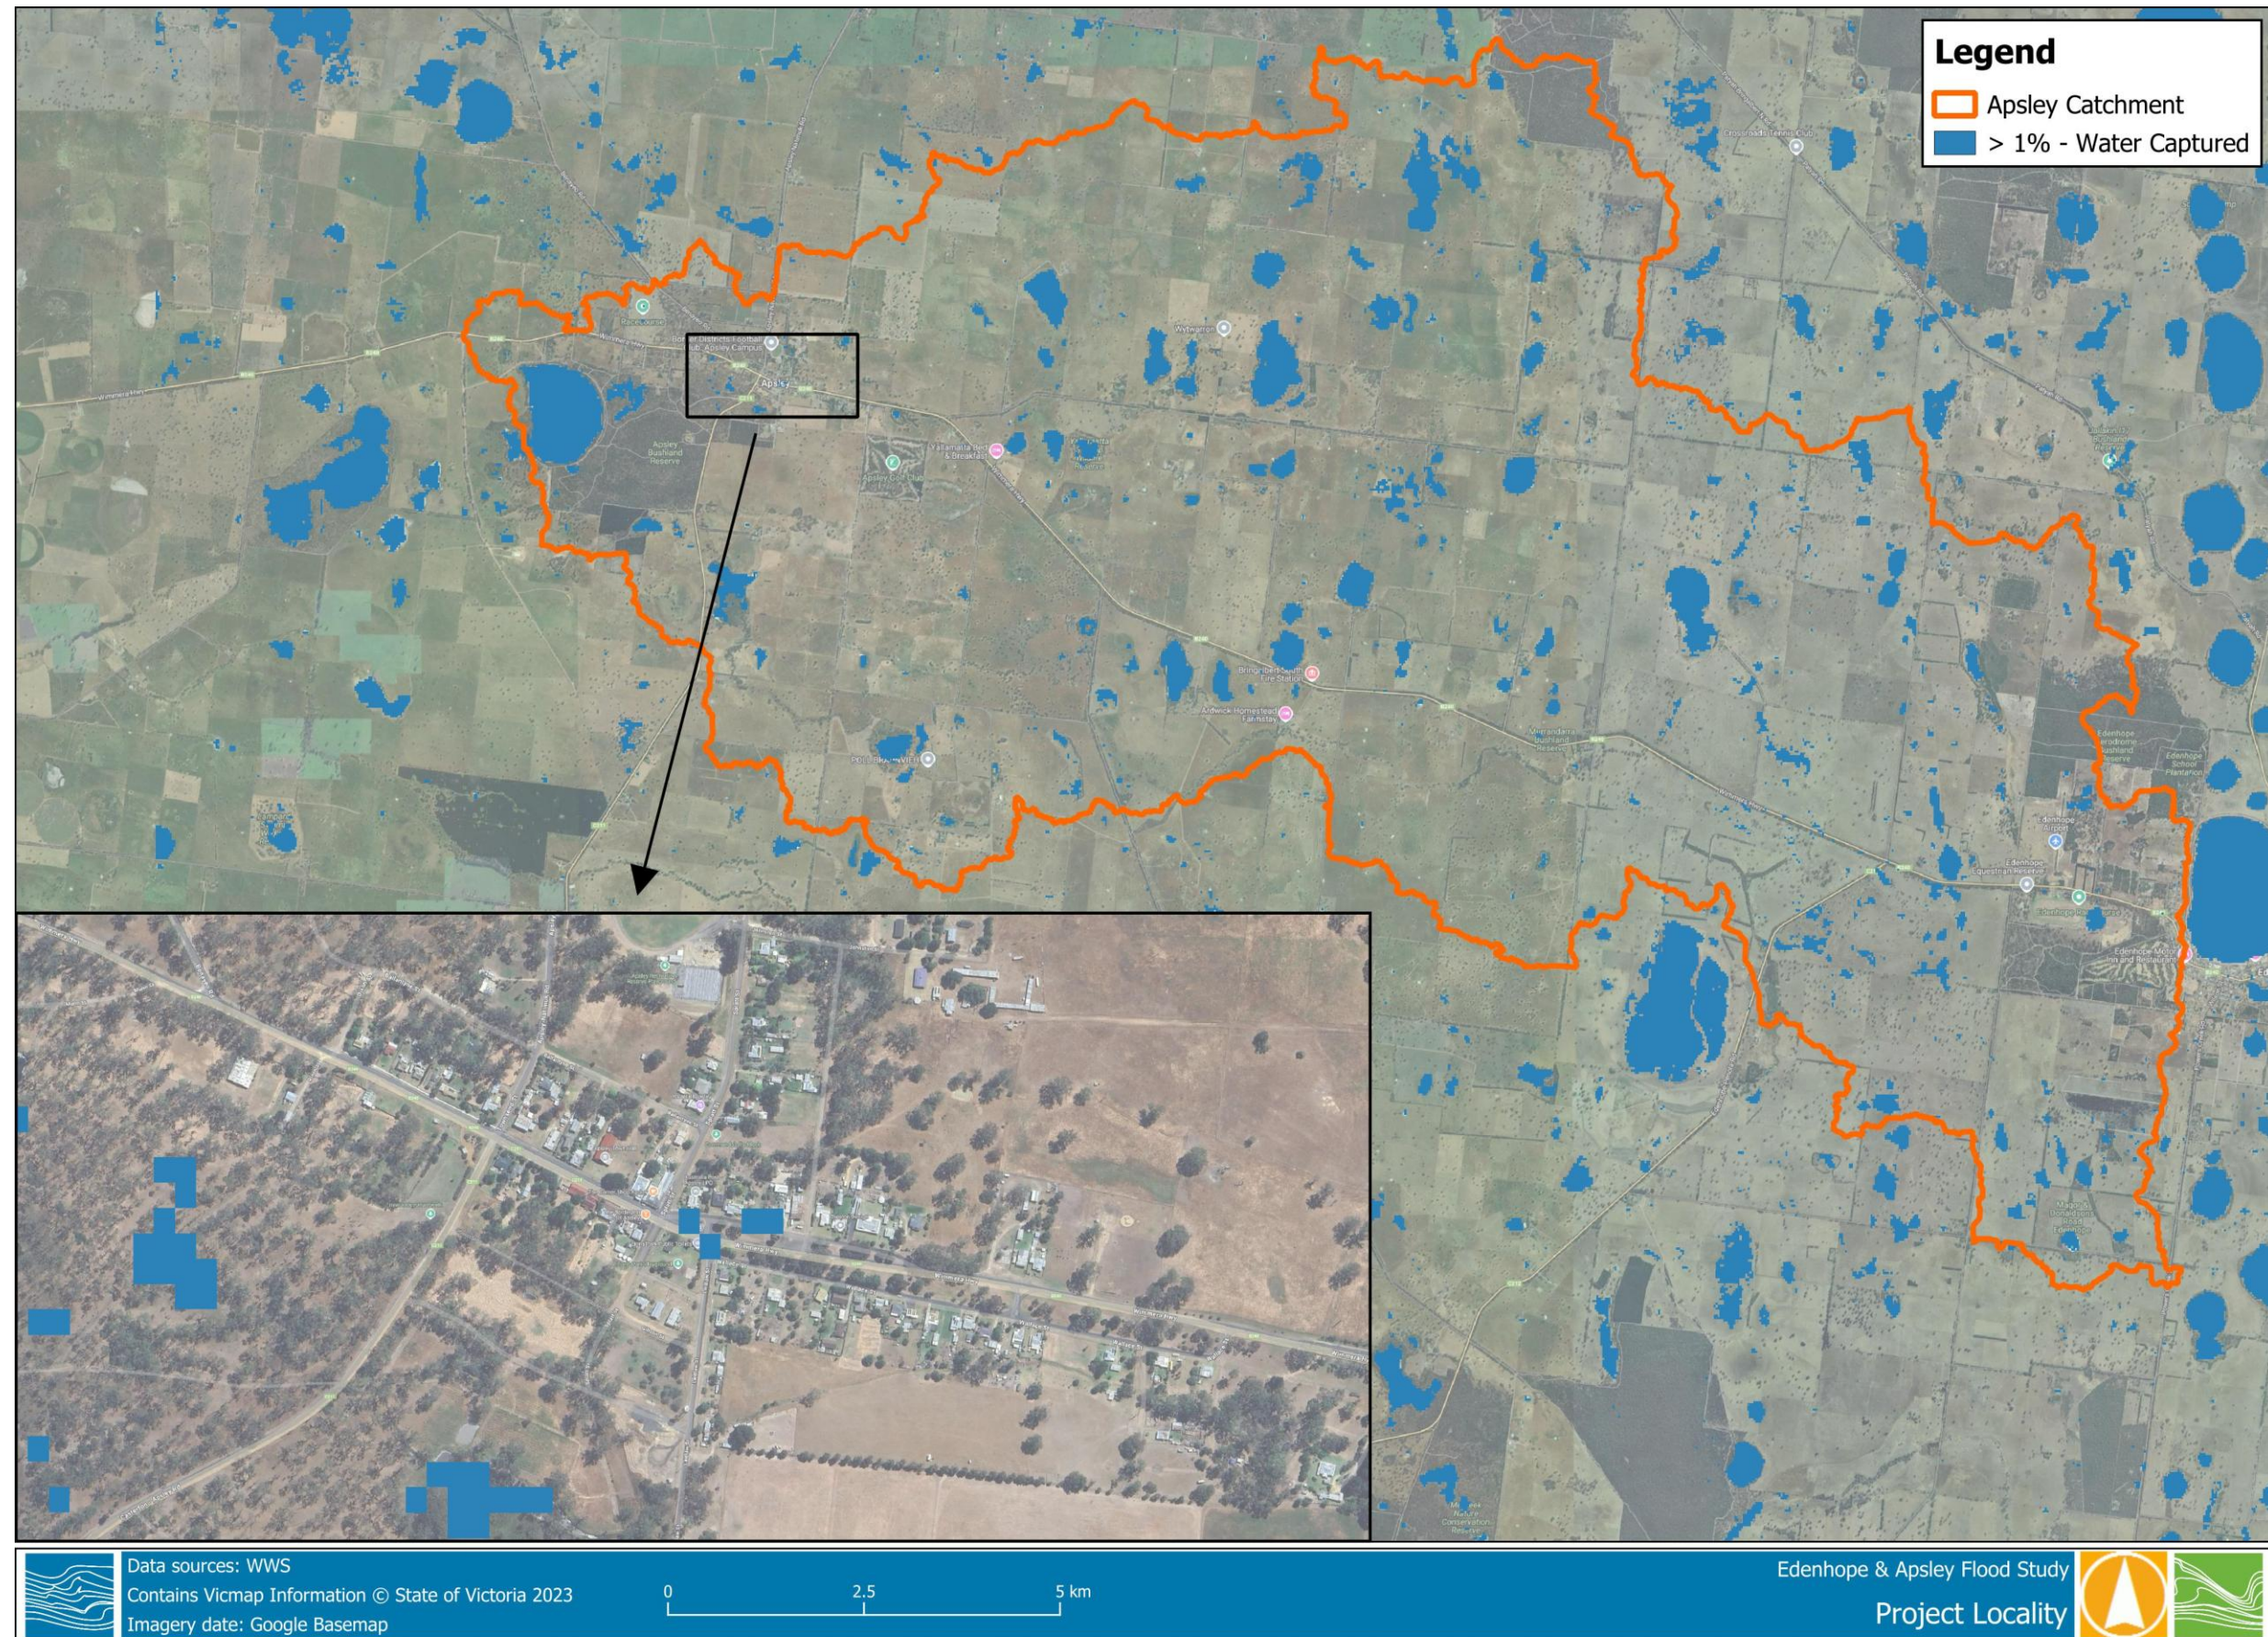


Figure 2-6 DEA Water Observation – 1% Return Frequency

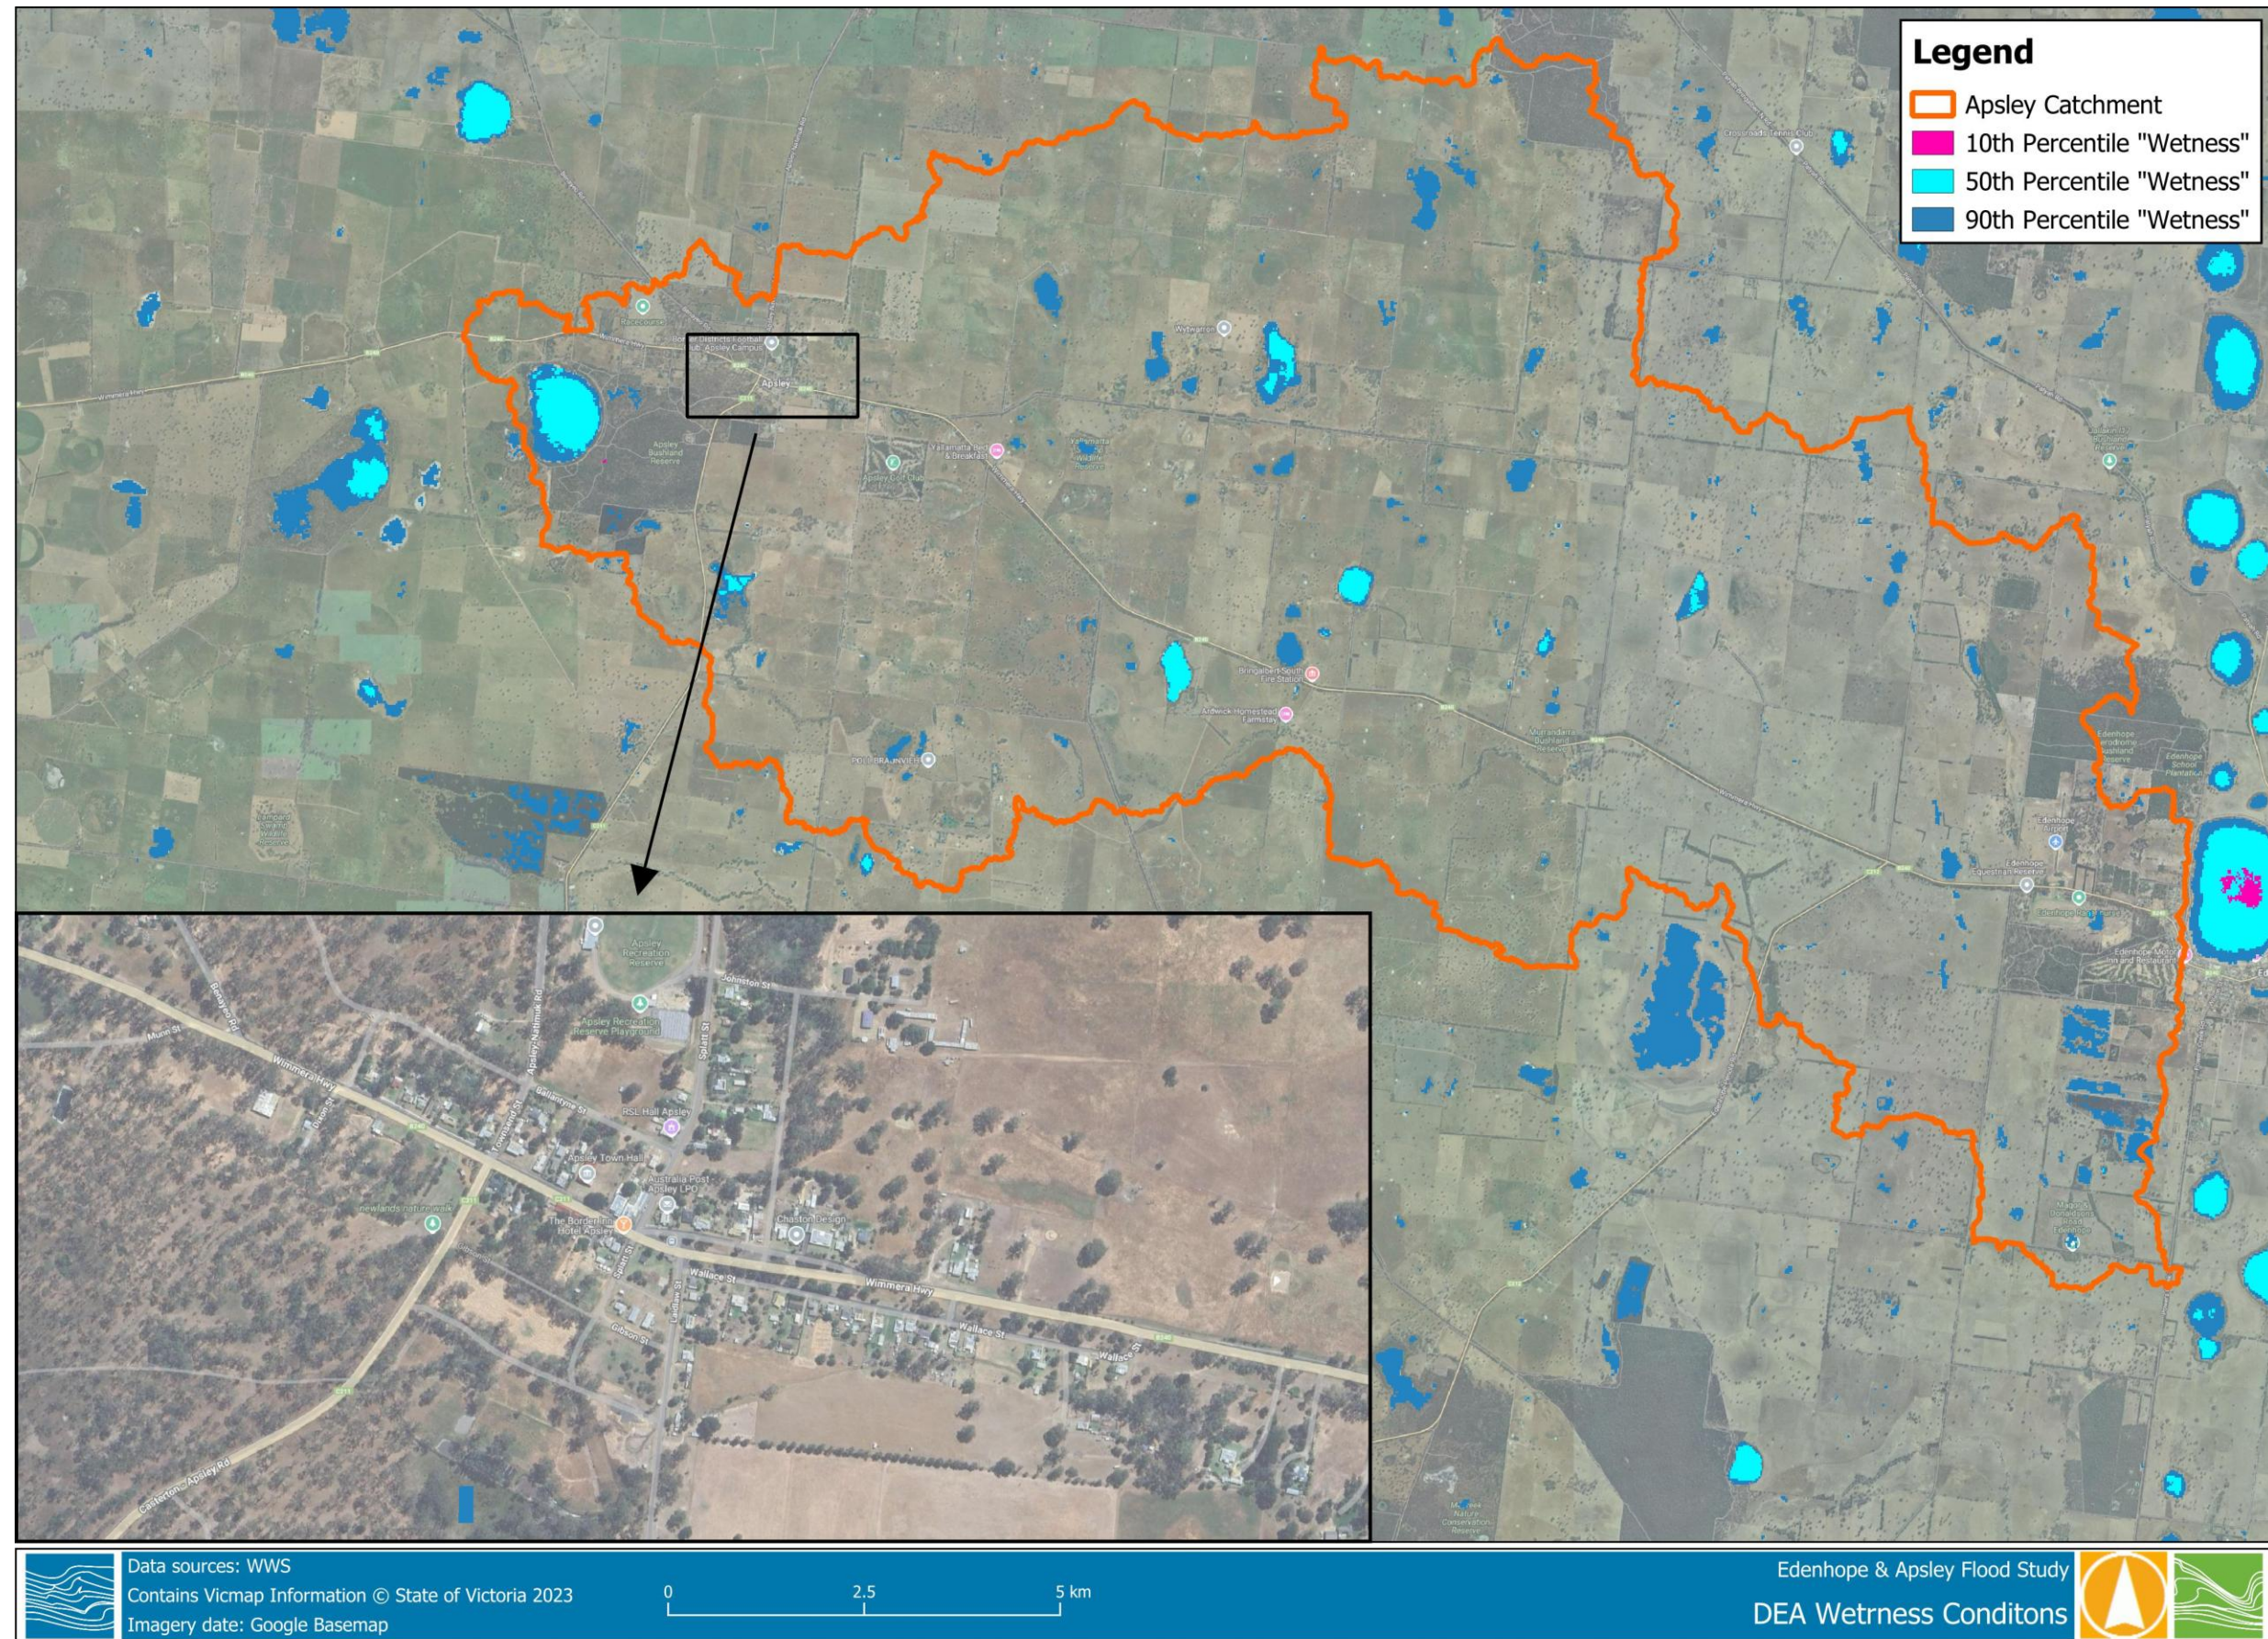


Figure 2-7 DEA Wetness Percentile – 10th, 50th and 90th for Water Bodies

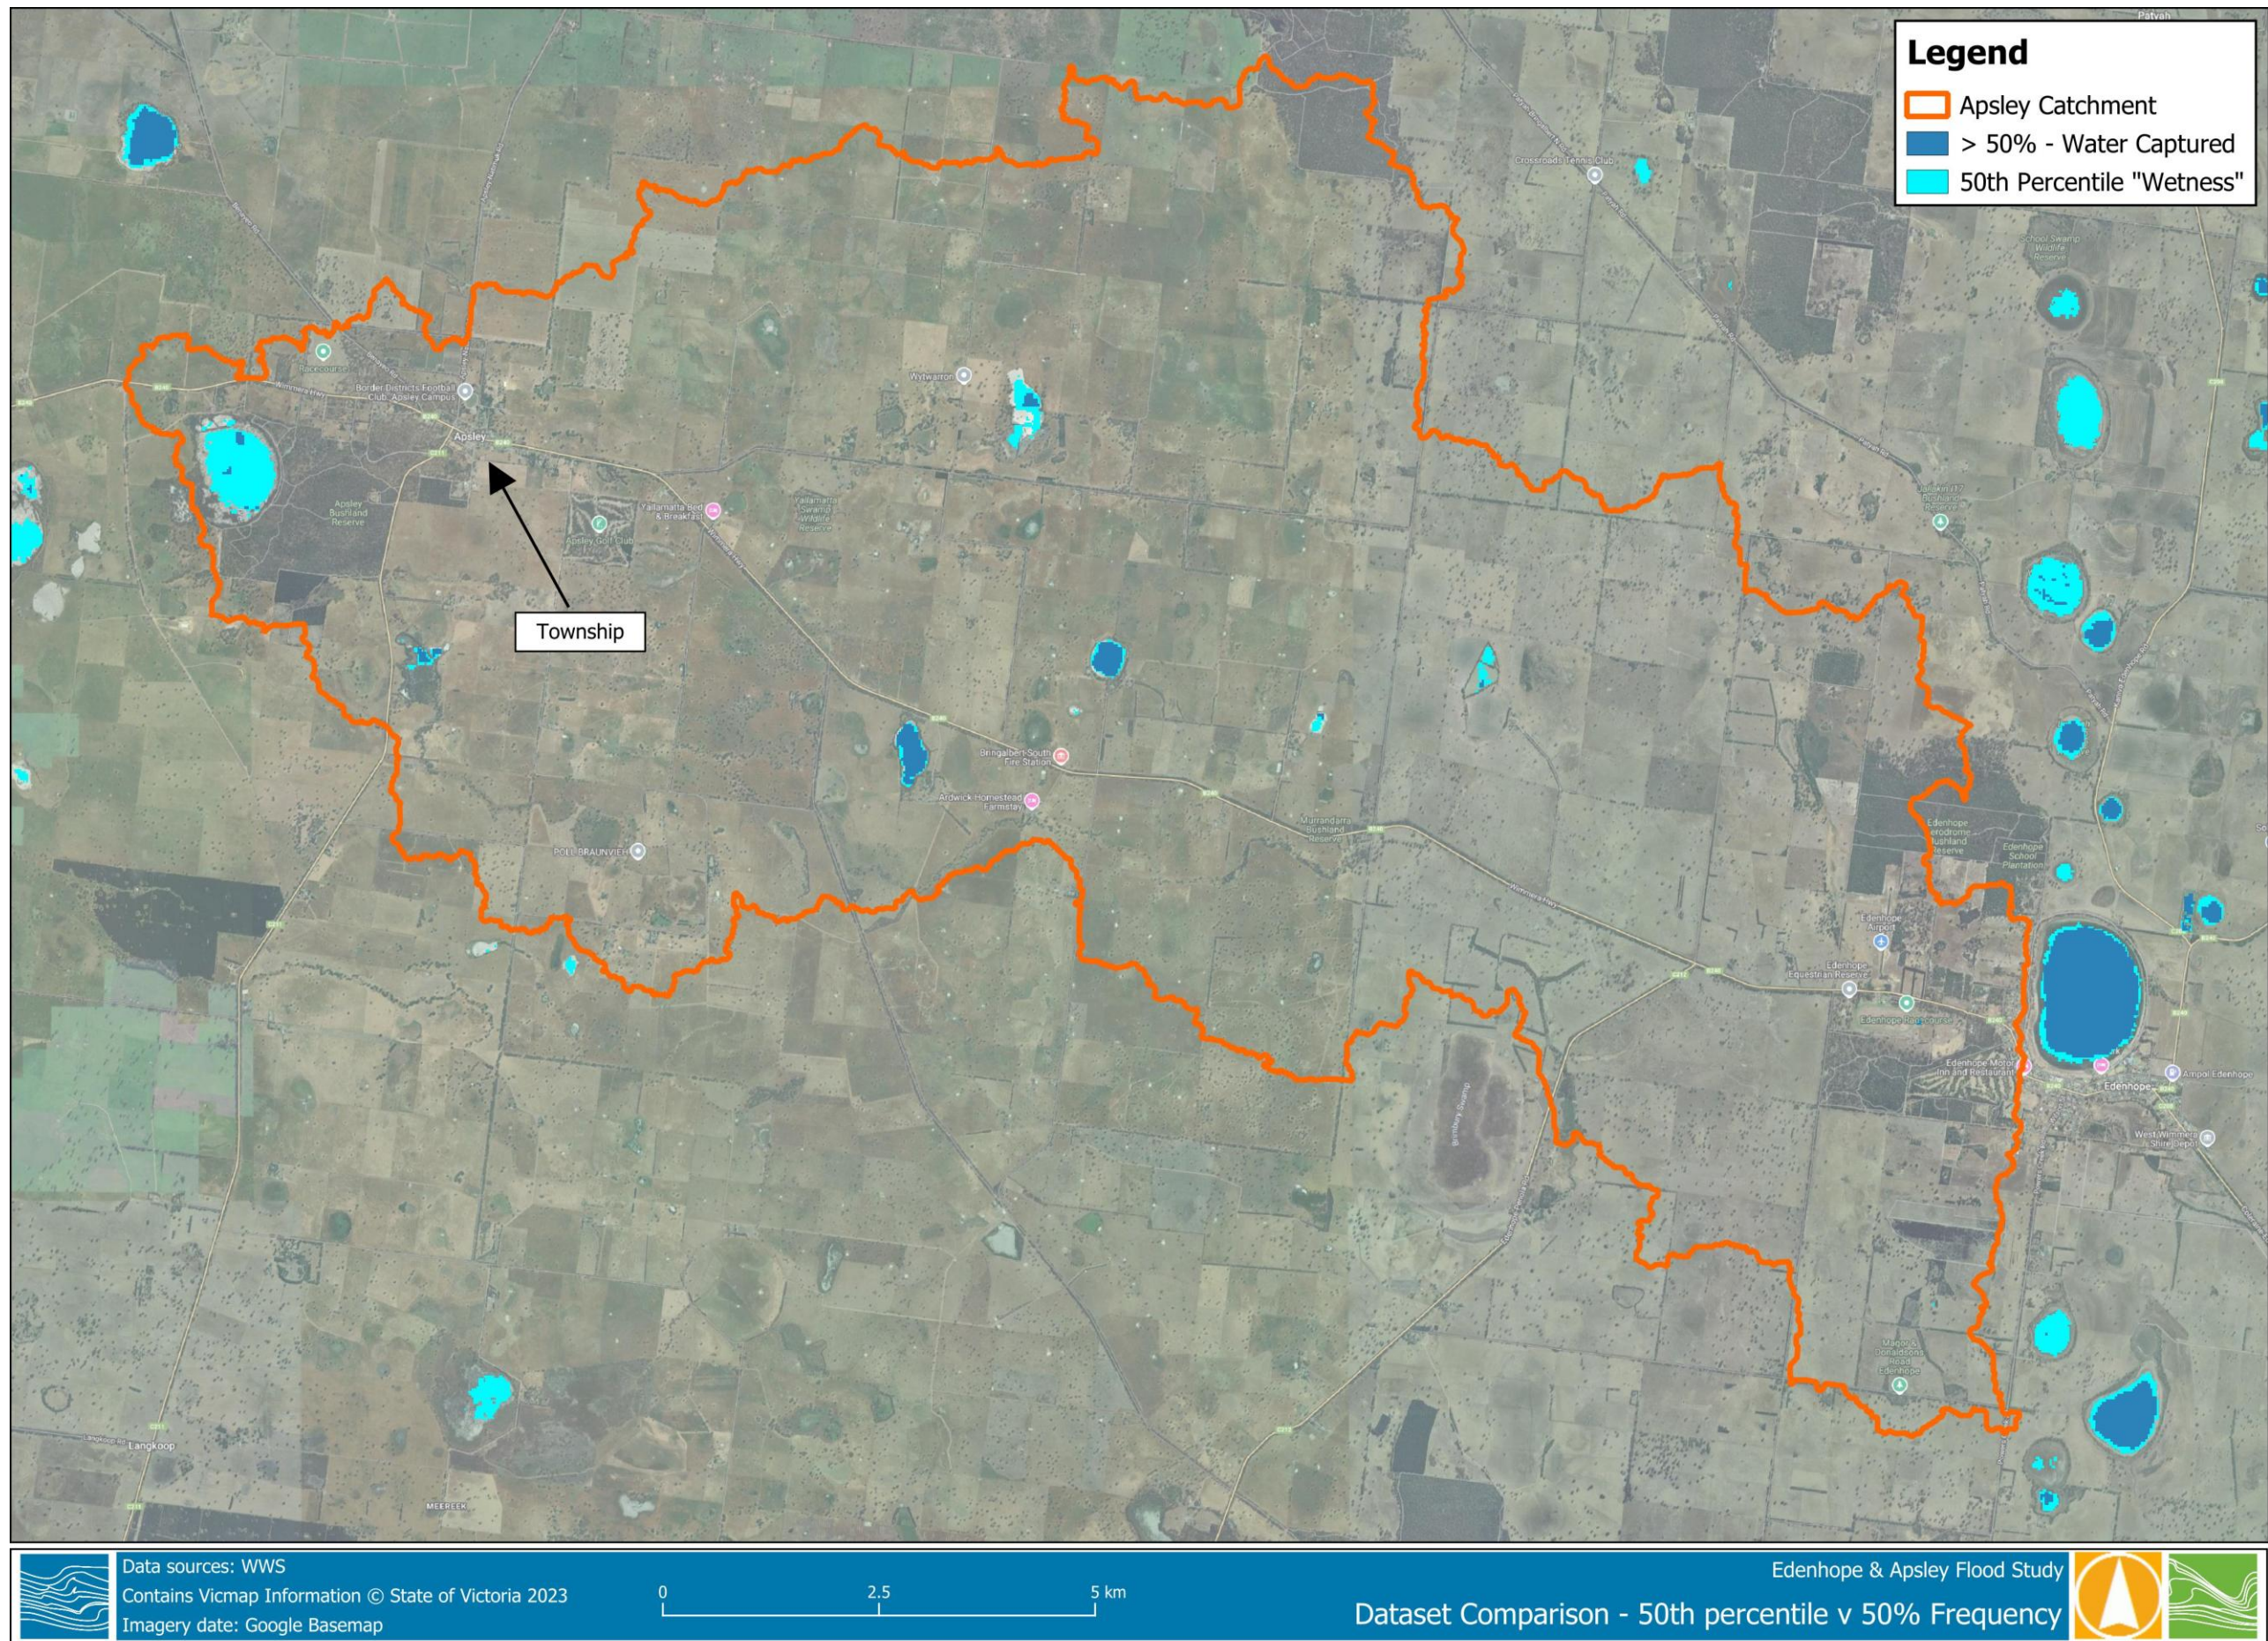


Figure 2-8 Comparison of Datasets



2.6 Design Rainfall and Losses

2.6.1 IFD design rainfall depths

The design rainfall depths were downloaded via Bureau of Meteorology (BoM) website using the centroid of each rainfall area (township & riverine). Table 2-2 and Table 2-3 show the design rainfall depths for each AEP and event durations for the Apsley model. Table 2-3 shows values which have been adjusted based on ARF calculated from the riverine catchment area of 168.7 km².

Table 2-2 IFD design rainfall depth (mm) – Township Catchment (No ARF)

Duration	20%	10%	5%	2%	1%	0.5%	0.2%	0.05%
1 hr	19.6	23.9	28.4	35	40.5	47.2	56.9	74.6
1.5 hr	22.4	27.2	32.4	39.9	46.1	53.6	64.6	84.7
2 hr	24.6	29.8	35.4	43.6	50.3	58.6	70.6	92.7
3 hr	27.9	33.8	40.1	49.3	57	66.4	80.2	105
4.5 hr	31.7	38.3	45.4	55.8	64.6	75.5	91.2	120
6 hr	34.6	41.9	49.6	61	70.7	82.6	99.9	132
9 hr	39.2	47.4	56	69	80.2	93.9	114	150
12 hr	42.8	51.6	61.1	75.3	87.7	103	124	164
18 hr	48.2	58.1	68.7	84.8	98.9	116	140	184
24 hr	52.2	63	74.4	91.9	107	125	151	198

Table 2-3 IFD design rainfall depth (mm) – Riverine Catchment (with ARF)

Duration	20%	10%	5%	2%	1%	0.5%	0.2%	0.05%
1 hr	15.3	18.4	21.5	26	29.6	34	40.1	50.9
1.5 hr	18.1	21.7	25.4	30.5	34.7	39.6	46.5	58.7
2 hr	20.4	24.2	28.2	33.9	38.3	43.8	51.3	64.5
3 hr	23.7	28.1	32.7	39.1	44.3	50.5	59.2	73.9
4.5 hr	27.7	32.9	38.4	46.1	52.5	60.3	71.2	90.3
6 hr	30.9	37	43.4	52.7	60.4	69.9	83.4	107.8
9 hr	35.8	43.1	50.6	61.9	71.5	83.3	100.4	130.6
12 hr	39.5	47.4	55.8	68.2	79	92.3	110.3	144.3
18 hr	45.1	54.2	63.8	78.4	91.1	106.5	127.8	166.7
24 hr	49.6	59.7	70.4	86.7	100.7	117.4	141.4	184.6



2.6.2 Temporal patterns

Temporal patterns were obtained via the ARR Data Hub using the catchment centroid. Temporal patterns were selected from the “Murray Basin region”. Given the limited size of each catchment, and in line with the recommendations of ARR2019, point temporal patterns were adopted.

To reduce computational time and model runs to identify the township critical duration/s, only three temporal patterns per duration were assessed: a front loaded, steady and rear loaded. The front-loaded pattern had most of the rainfall occurring within the first third of the storm and the back loaded in the last third, while the steady had relatively constant rainfall bursts. The patterns modelled are listed in Table 2-4.

Once the critical storm duration/s were determined (Section 3.4) all ten temporal patterns were run for these durations and adopted for the design mapping.

Table 2-4 1% AEP analysed durations and temporal patterns

Duration	Front loaded	Steady	Rear loaded
1 hr	TP04	TP03	TP09
1.5 hr		TP01	
2 hr	TP02		
3 hr	TP04	TP06	TP02
4.5 hr	TP05	TP07	
6 hr	TP04	TP08	TP10
9 hr	TP05	TP07	TP01
12 hr	TP010	TP06	TP03
18 hr	TP07		
24 hr	TP04	TP03	TP02



3 SENSITIVITY ANALYSIS

Sensitivity testing of flood models consists of altering an input or parameter and comparing results to the base case, to understand the parameter's influence on flood behaviour. Sensitivity testing of the model was undertaken for a range of parameters and inputs. Sensitivity testing of the model was completed for the Apsley model for the 10% and 1% AEP events only.

3.1 Initial Water Level

A sensitivity test was undertaken to determine how varying initial water level could impact the 10% and 1% AEP flood levels and extents. The following scenarios were tested for the 12 hours storm durations for 10% and 1% AEP events:

- “Base” Case – Adopting the 90th percentile of observed “wetness”
- “Very Dry” Case – Adopting the 10th percentile of observed “wetness”
- “Dry” Case – Adopting the 50th percentile of observed “wetness”
- “Wet” Case – Adopting the 99th percentile of observed water.

The water surface elevations for the very dry, dry and wet case scenarios were compared to the base case, as presented in Figure 3-1 to Figure 3-2, Figure 3-3 to Figure 3-4, and Figure 3-5 to Figure 3-6, for the two AEP modelled respectively. The results demonstrate that the initial water level has the following influence:

- Increased waters levels within the storages, increasing with wetter catchment conditions.
- Minimal change along flow paths connecting the storages (less than 10 mm) or within the township (less than 5 mm).

The impact of initial water levels demonstrates that the storages have controlled spill locations and significant volume to attenuate flows. Therefore, the impact to flooding along flow paths within Apsley is similar. The areas impacted are localised to the storages, including the bushland reserved downstream of the township, and are more dependent on long term rainfall than individual rainfall events. This indicates the catchment is not overly sensitive to the initial water levels. Based on these findings the adoption of the base case initial water level (90th percentile) was considered suitable.

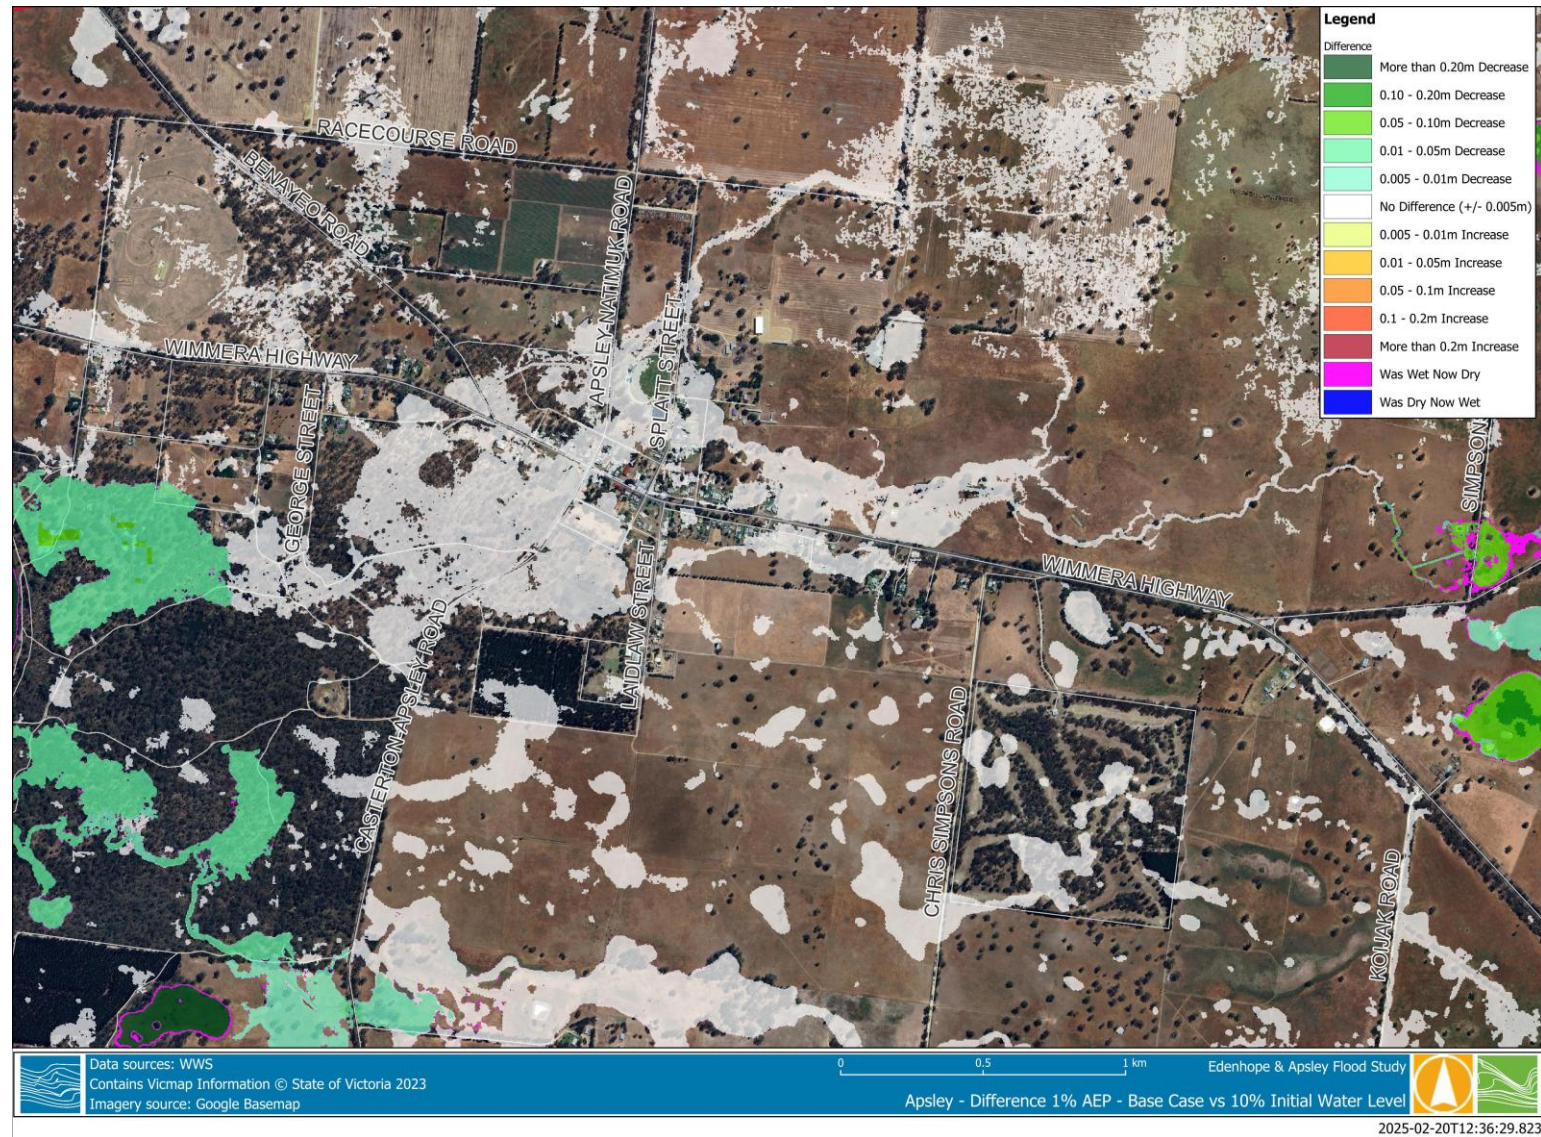


Figure 3-1 Difference Plot for 1% AEP – Base Case vs 10% Initial Water Level

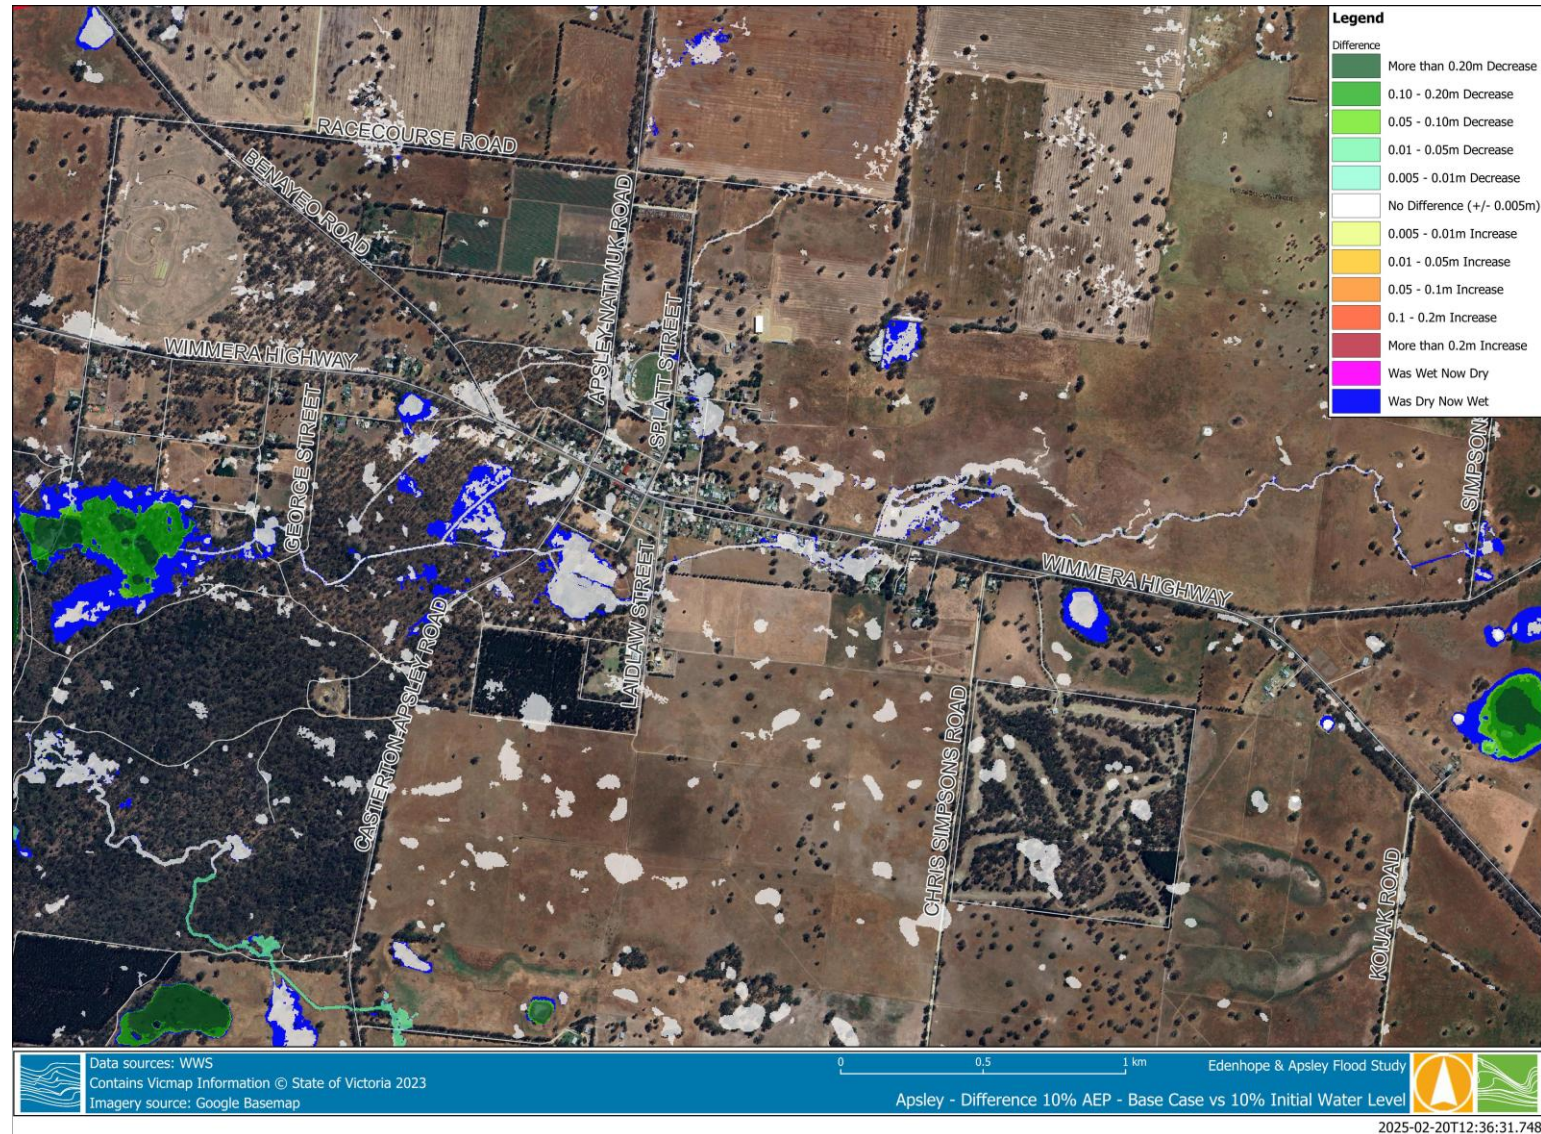


Figure 3-2 Difference Plot for 10% AEP - Base Case vs 10% Initial Water Level

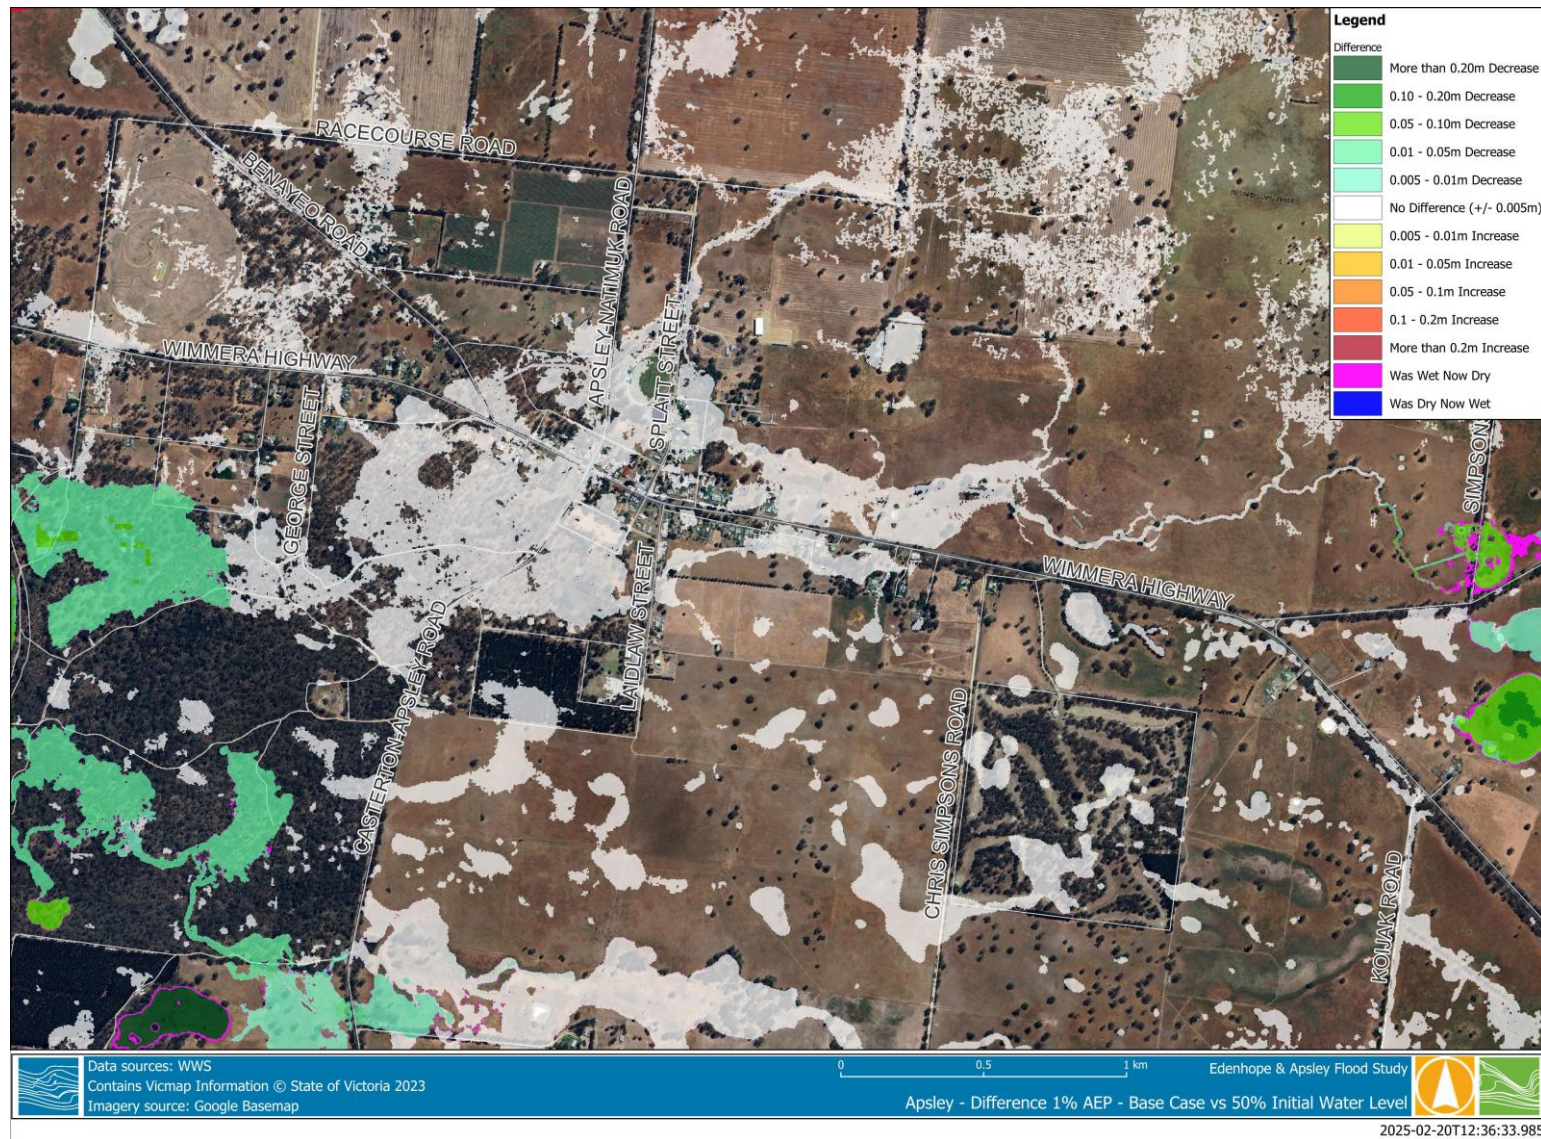


Figure 3-3 Difference Plot for 1% AEP – Base Case vs 50% Initial Water Level



Figure 3-4 Difference Plot for 10% AEP - Base Case vs 50% Initial Water Level

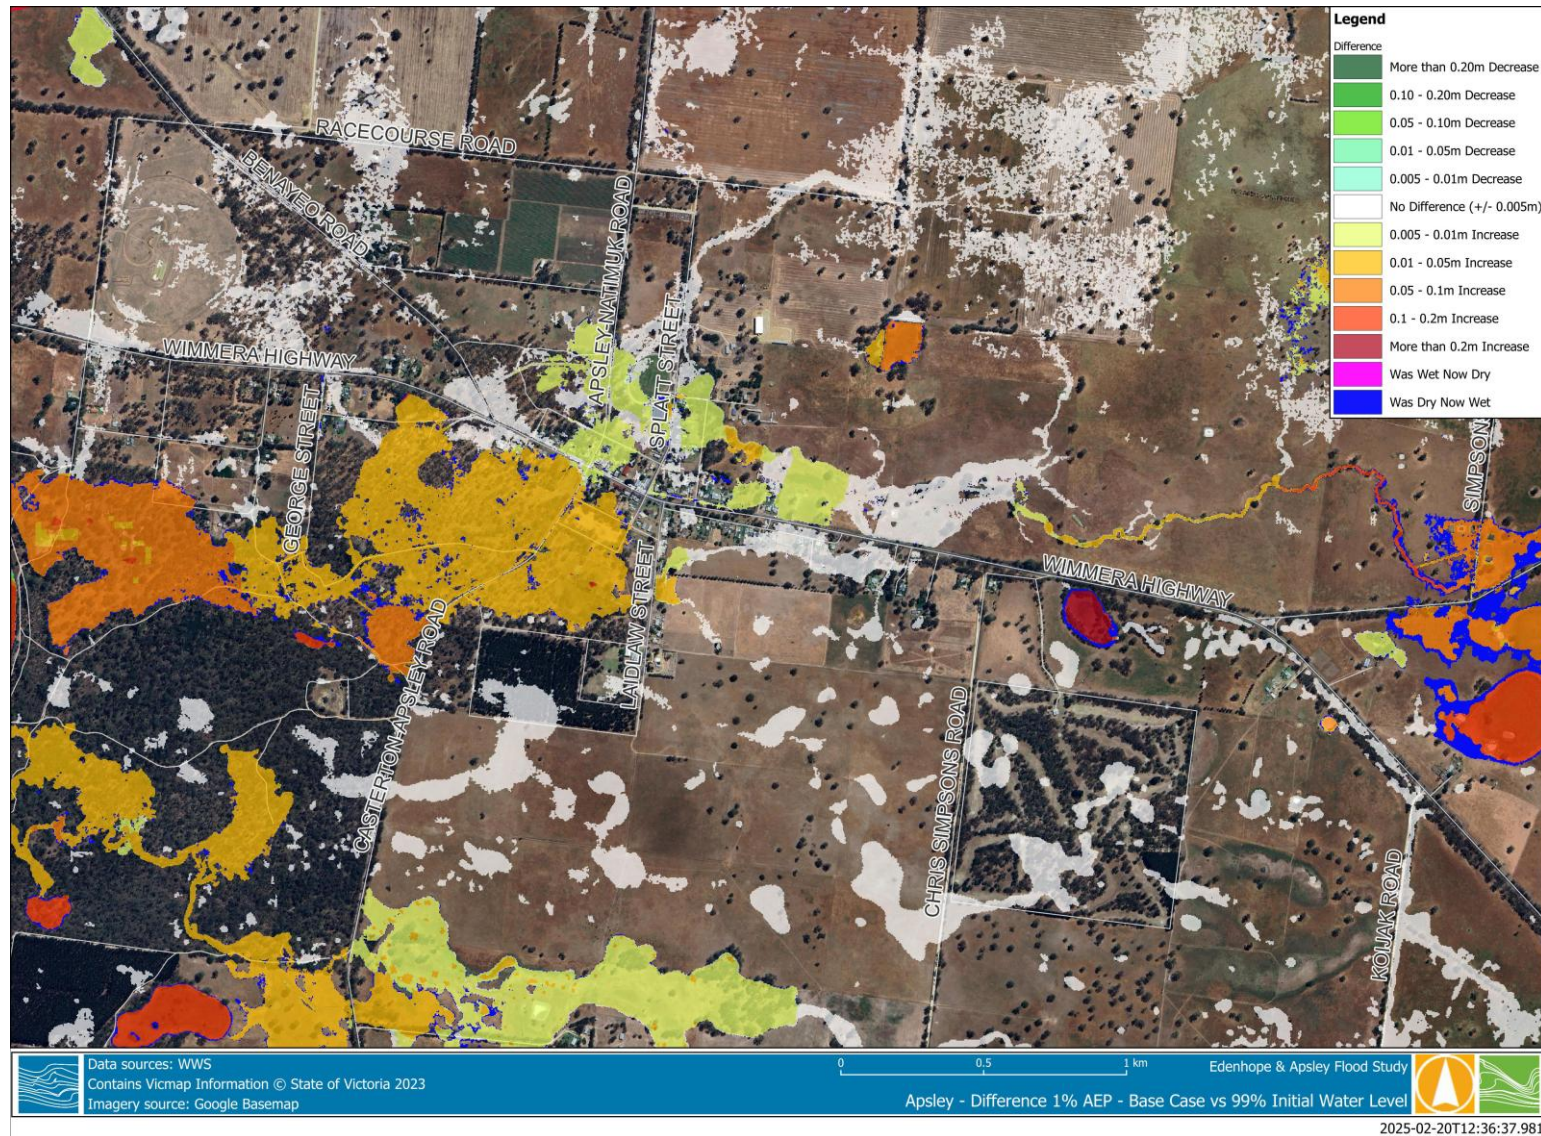


Figure 3-5 Difference Plot for 1% AEP - Base Case vs 99% Initial Water Level

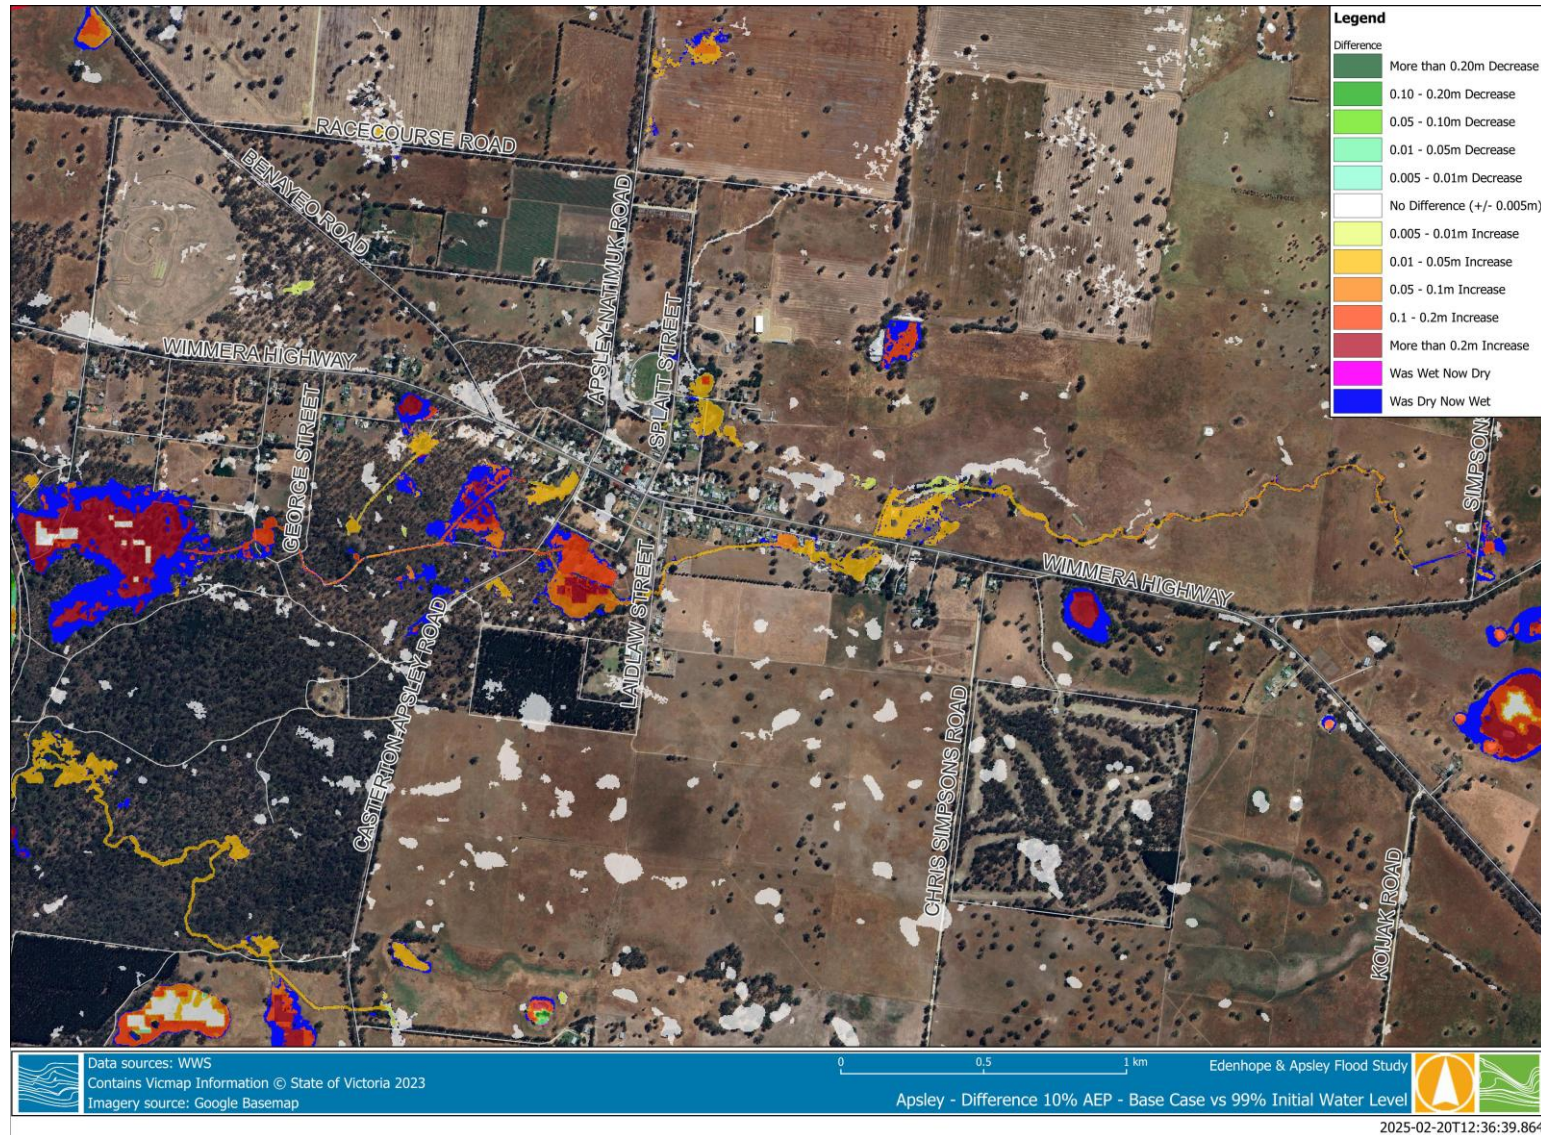


Figure 3-6 Difference Plot for 10% AEP - Base Case vs 99% Initial Water Level



3.2 Rainfall Losses and Pre-burst

The ARR Data Hub Victorian Specific Data suggests that applying pre-burst rainfall losses³ influences water levels. The sensitivity to pre-burst rainfall was undertaken to reduce rainfall loss by the 10%, 50%, and 75% pre-burst ratios. The following scenarios were tested for the 12 hours storm durations for 10% and 1% AEP events:

- Base Case – Adopting the 75th percentile for the pre-burst ratio.
- No Pre-burst” Case – Adopting the 10th percentile for the pre-burst ratio.
- Lower Pre-burst Case – Adopting the 50th percentile for the pre-burst ratio.

The water surface elevations for the two lower percentile pre-bursts were compared to the 75th percentile pre-burst depths. The resultant difference plots for comparing the 10th percentile against the 75th and the 50th percentile against the 75th for the two modelled AEP events are presented in Figure 3-7 to Figure 3-8, and Figure 3-9 to Figure 3-10, respectively.

The results show that the maximum water level decrease is 0.2 m for the 1% AEP and 0.1 m for the 10% AEP flood events, when compared to the base case. Some areas have a higher amount of decrease in water level (approximately 0.8 m decrease) as the depression/storage becomes filled. This demonstrates some sensitivity to rainfall losses influenced by pre-burst, which is primarily driven by an increase or decrease in the volume of water spilling from the upstream storages. Based on the ARR 2019 recommendations, the adopted pre-burst ratio for the design storm event was the 75th percentile.

³ https://data.arr-software.org/vic_specific

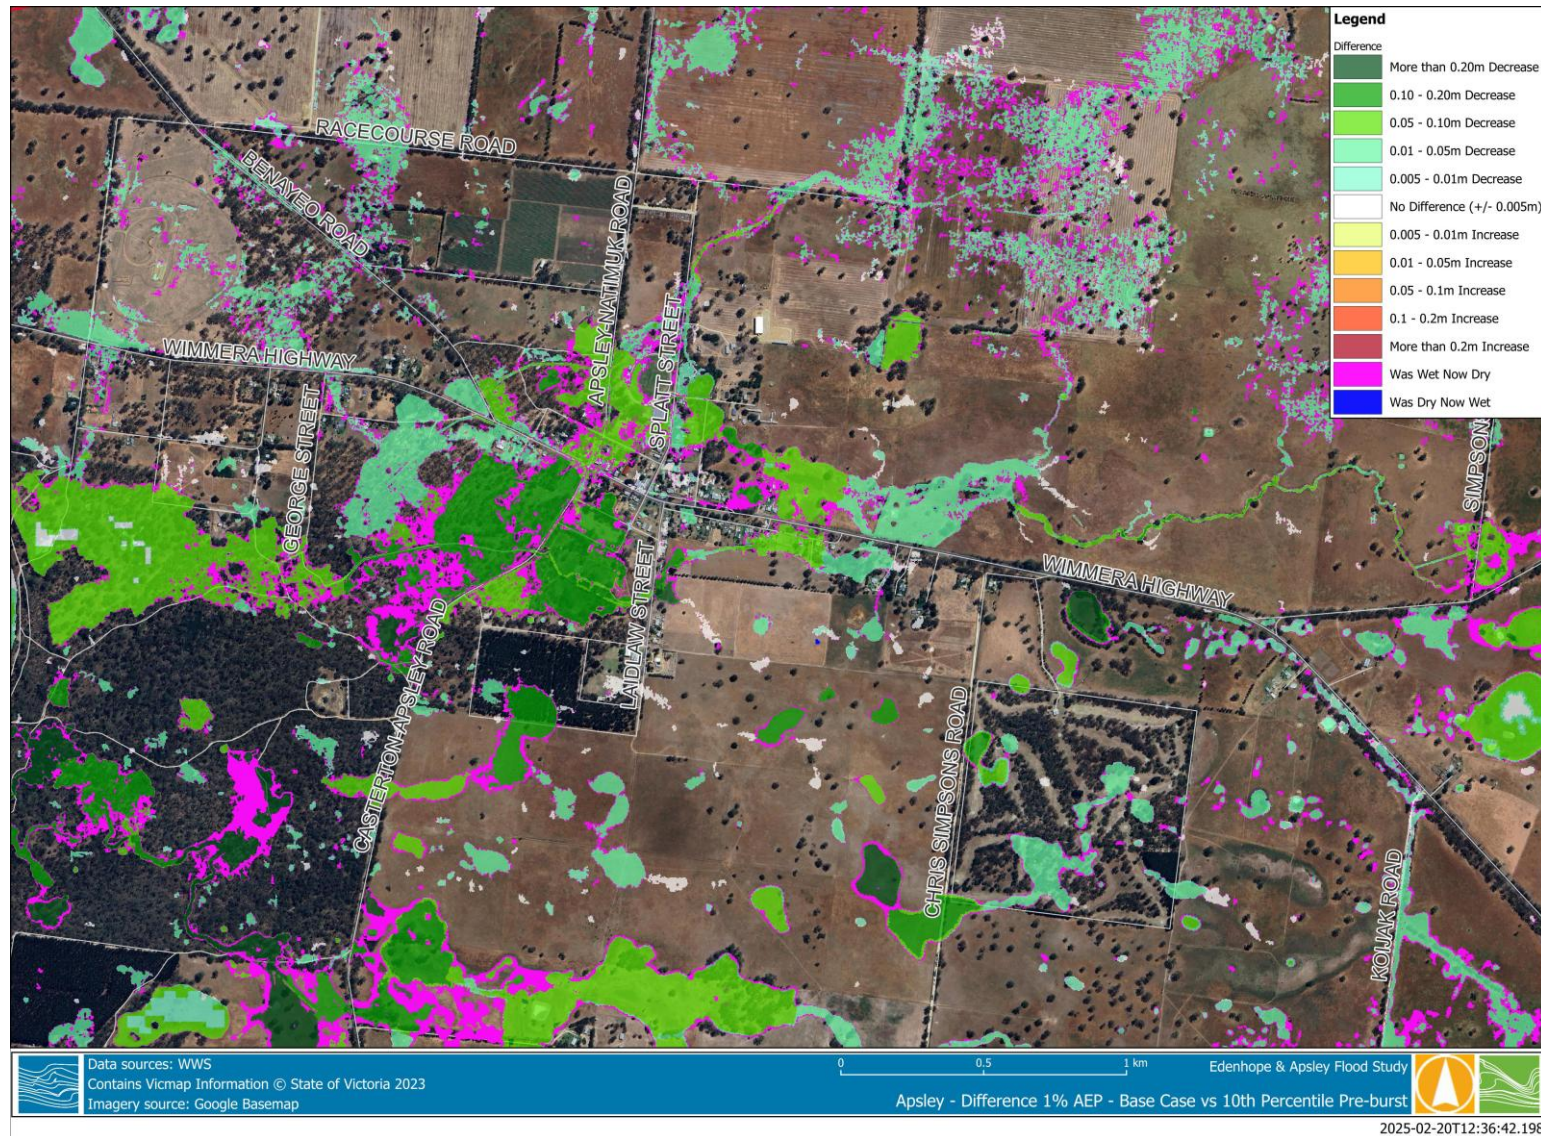


Figure 3-7 Difference Plot for 1% AEP – Base Case vs 10th Percentile Pre-burst

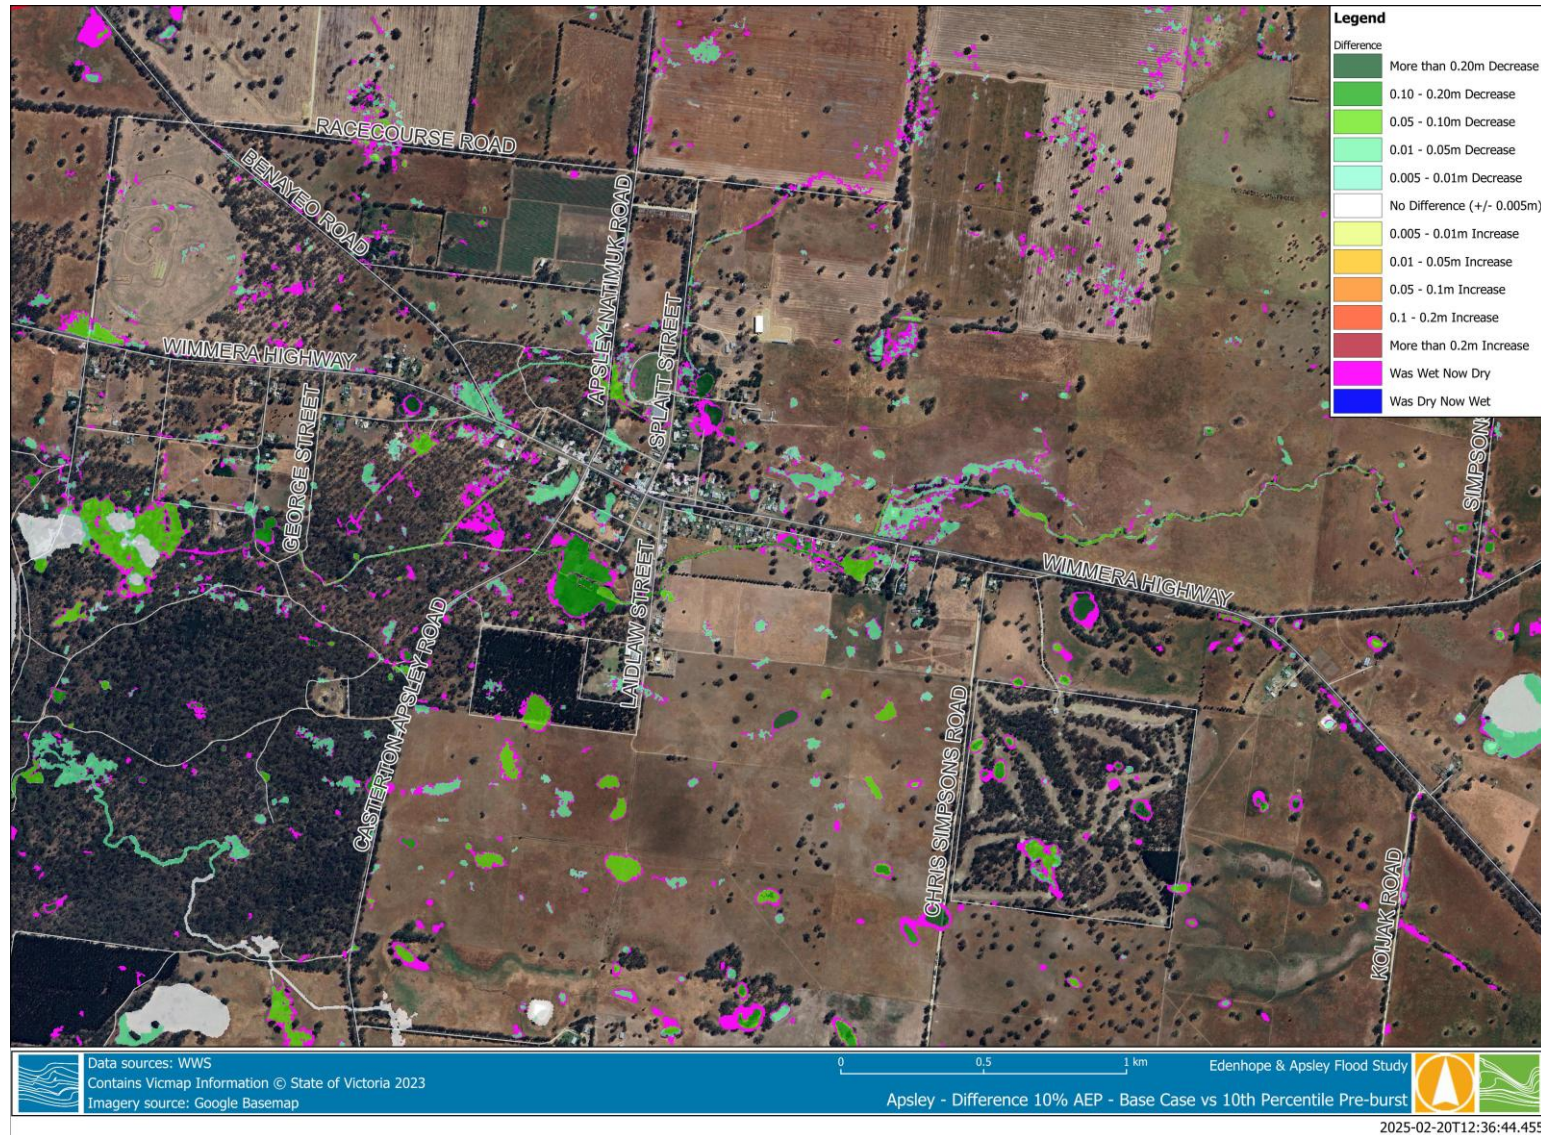


Figure 3-8 Difference Plot for 10% AEP – Base Case vs 10th Percentile Pre-burst

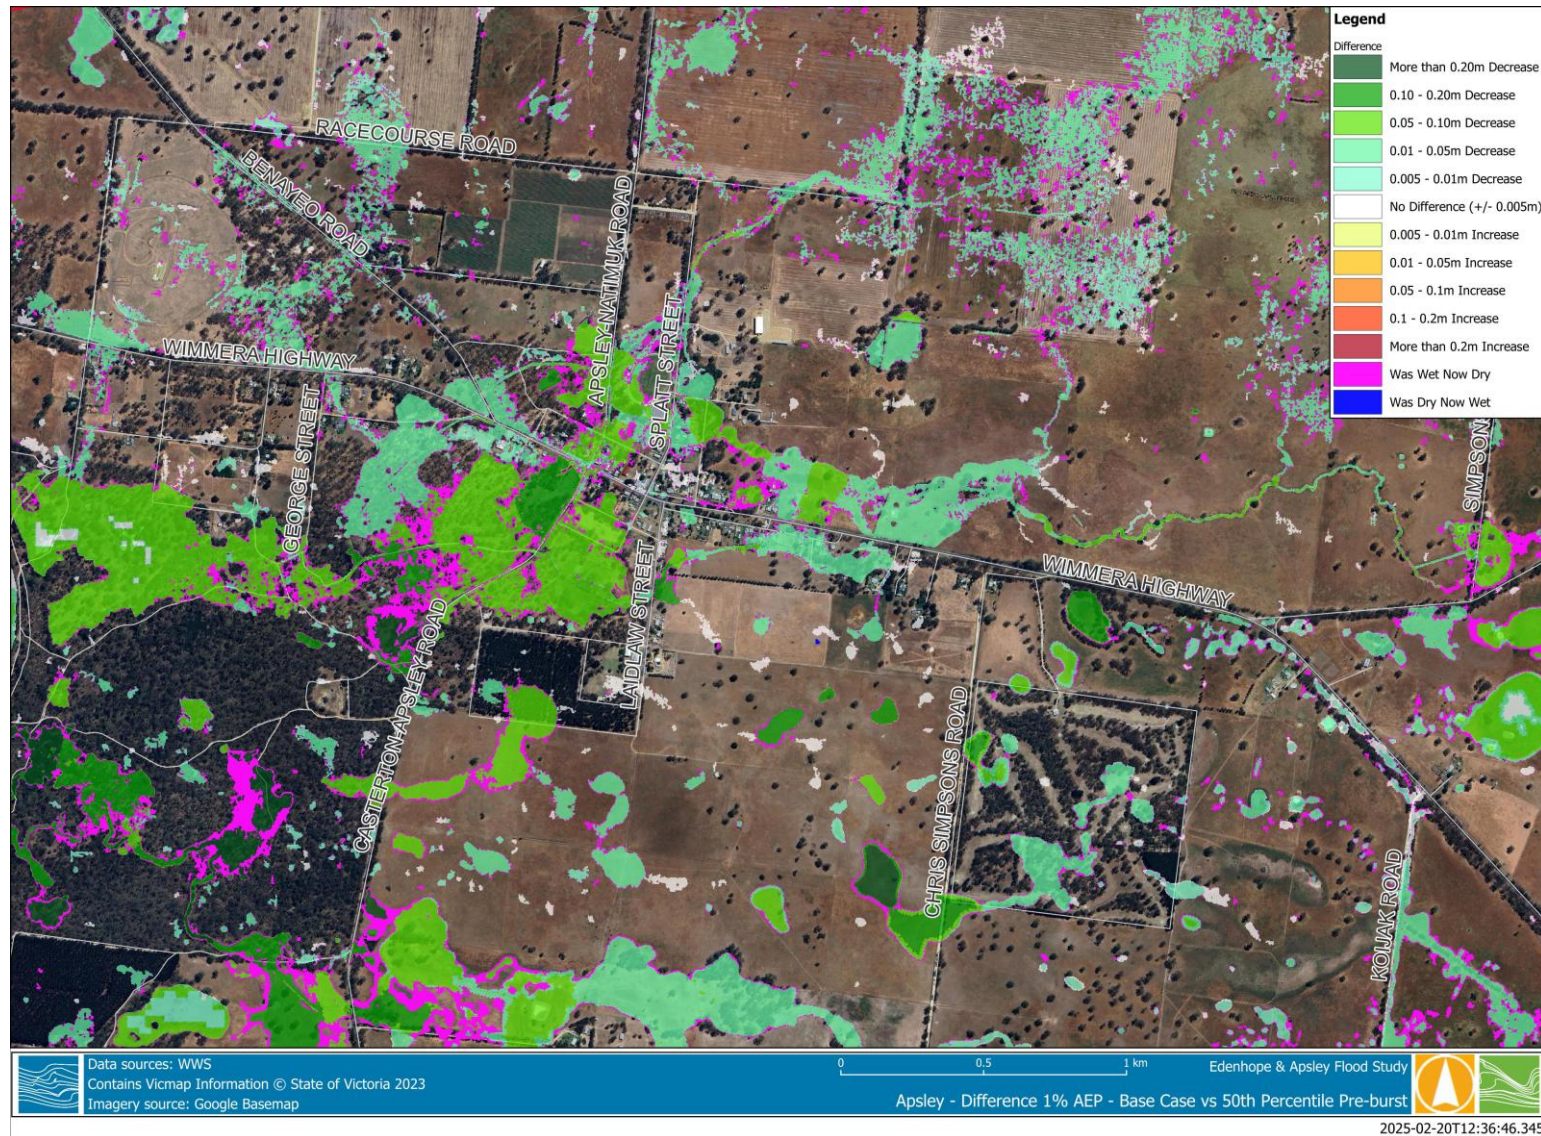


Figure 3-9 Difference Plot for 1% AEP – Base Case vs 50th Percentile Pre-burst

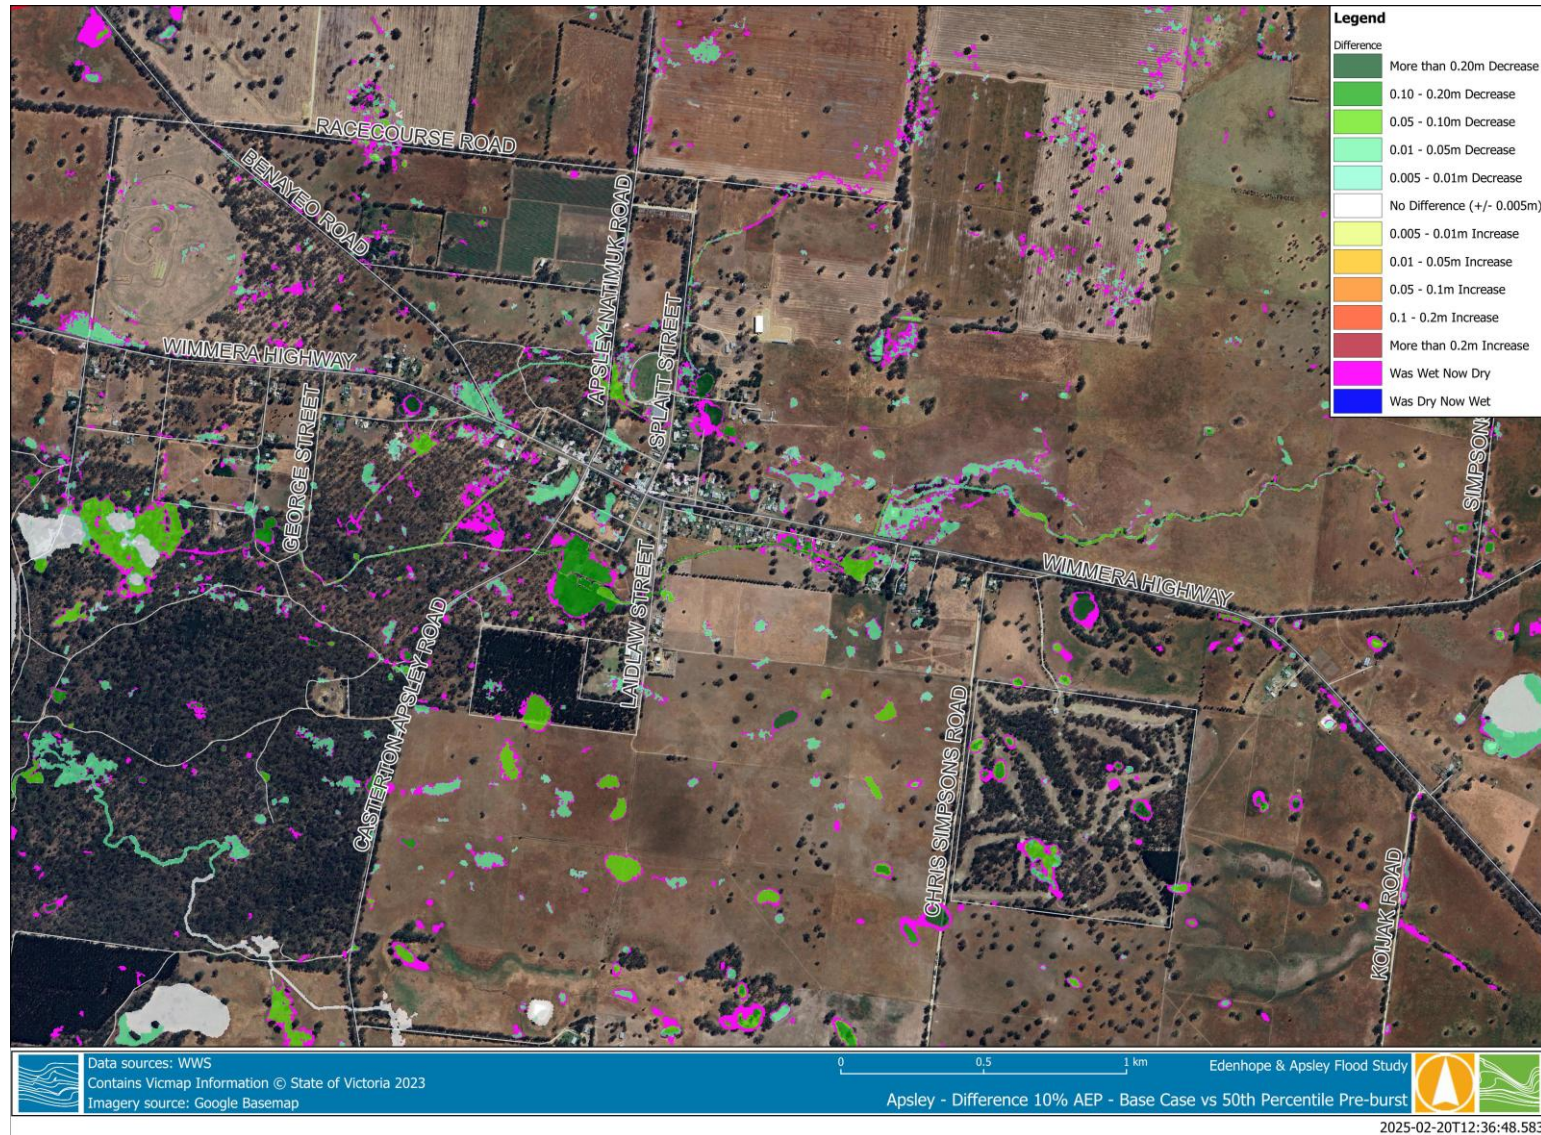


Figure 3-10 Difference Plot for 10% AEP – Base Case vs 50th Percentile Pre-burst



3.3 Roughness coefficients

Sensitivity to roughness within the hydraulic model was tested by lowering and raising the Manning's 'n' roughness, to assess its impact on the flood behaviour. The roughness values in the model, as listed in Table 2-1, were multiplied by a factor of 0.8 and 1.2 for the low and high roughness values, respectively.

The water surface elevations for the lowered and increased roughness were compared against the baseline values. The difference in water surface elevation for the lowered scenario and the increased scenario for the two AEP events is presented in Figure 3-11 to Figure 3-12, and Figure 3-13 to Figure 3-14, respectively.

The results show that the change in water level differences for both 10% and 1% AEP flood events was minimal, with a difference of up to +/- 0.05 m in the township. The most changes observed within the Apsley catchment were along the upstream flow path and downstream storage (where the bushland reserve is located) of the township, with a slightly higher difference up to +/- 0.10 m. The comparison of lowered and increased roughness with the baseline has shown no significant impact on the flood extent of the catchment. The adopted roughness values were selected based on the previously calibrated flood event. The sensitivity testing of lowered and increased roughness values has minimal flooding impact along flow paths within Apsley, resulting in minimal consequence with the change in roughness values. Hence, the adopted roughness values are considered suitable in this model.



Figure 3-11 Difference Plot for 1% AEP - Base Case vs factor of 0.8 Roughness Value

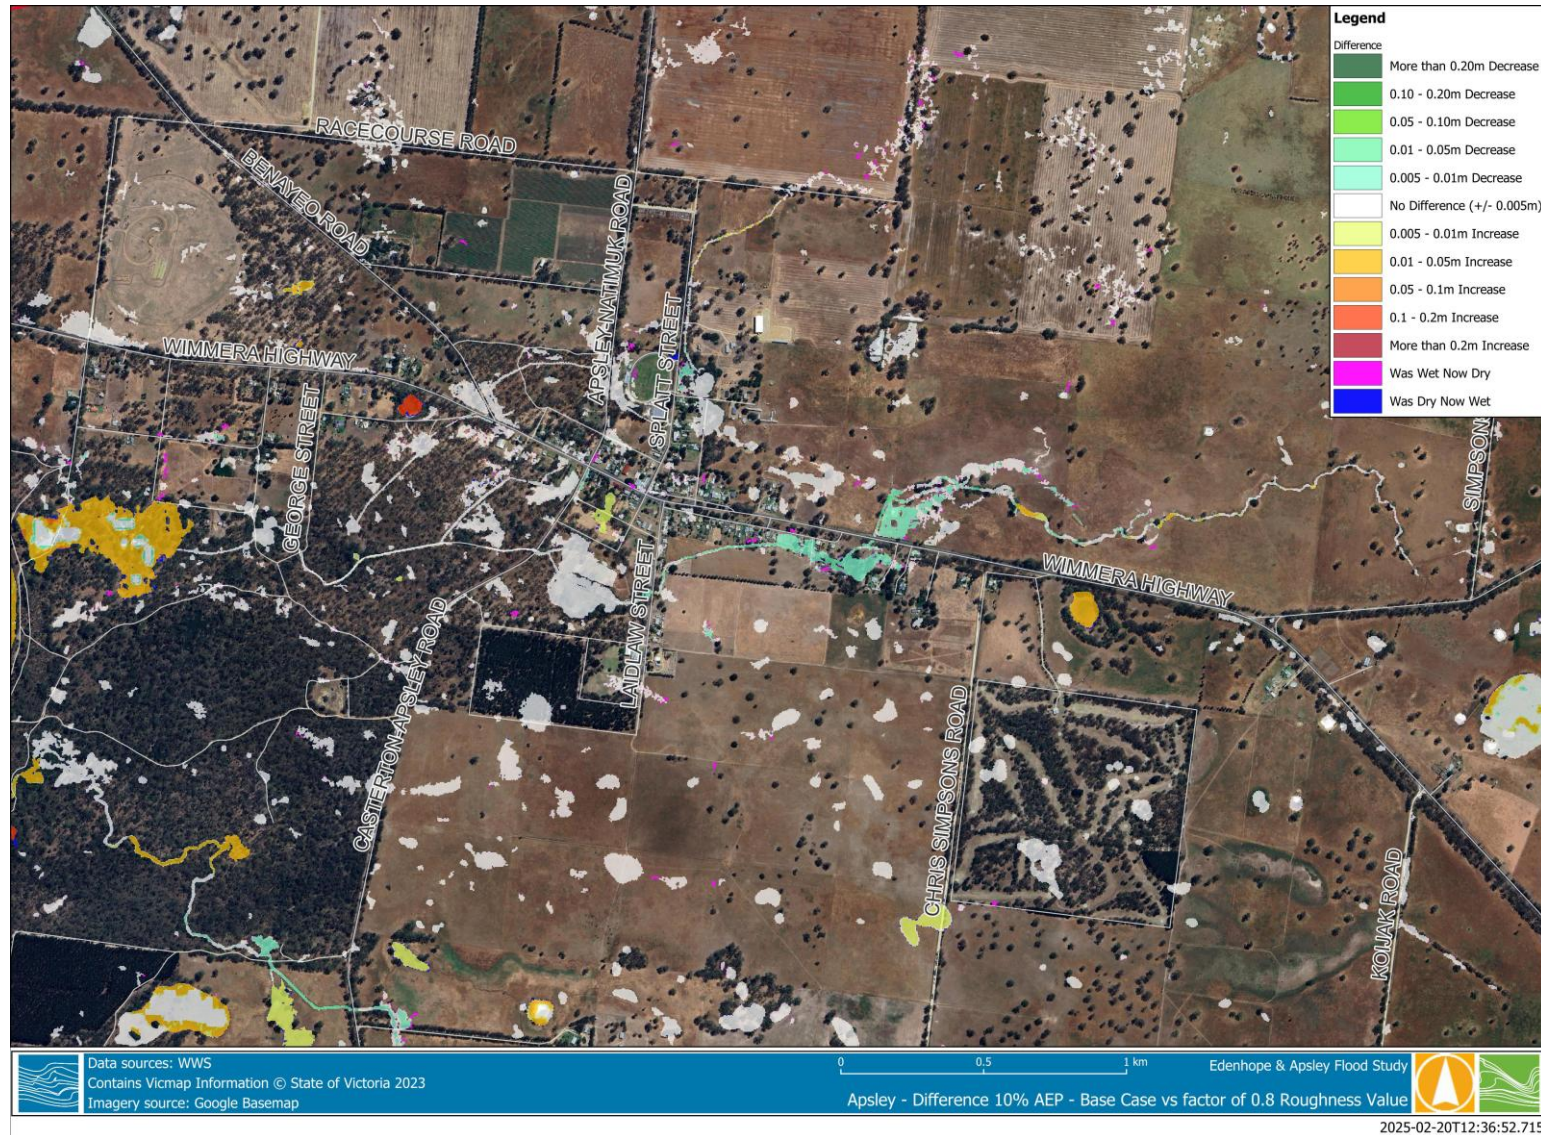


Figure 3-12 Difference Plot for 10% AEP - Base Case vs factor of 0.8 Roughness Value



Figure 3-13 Difference Plot for 1% AEP - Base Case vs factor of 1.2 Roughness Value

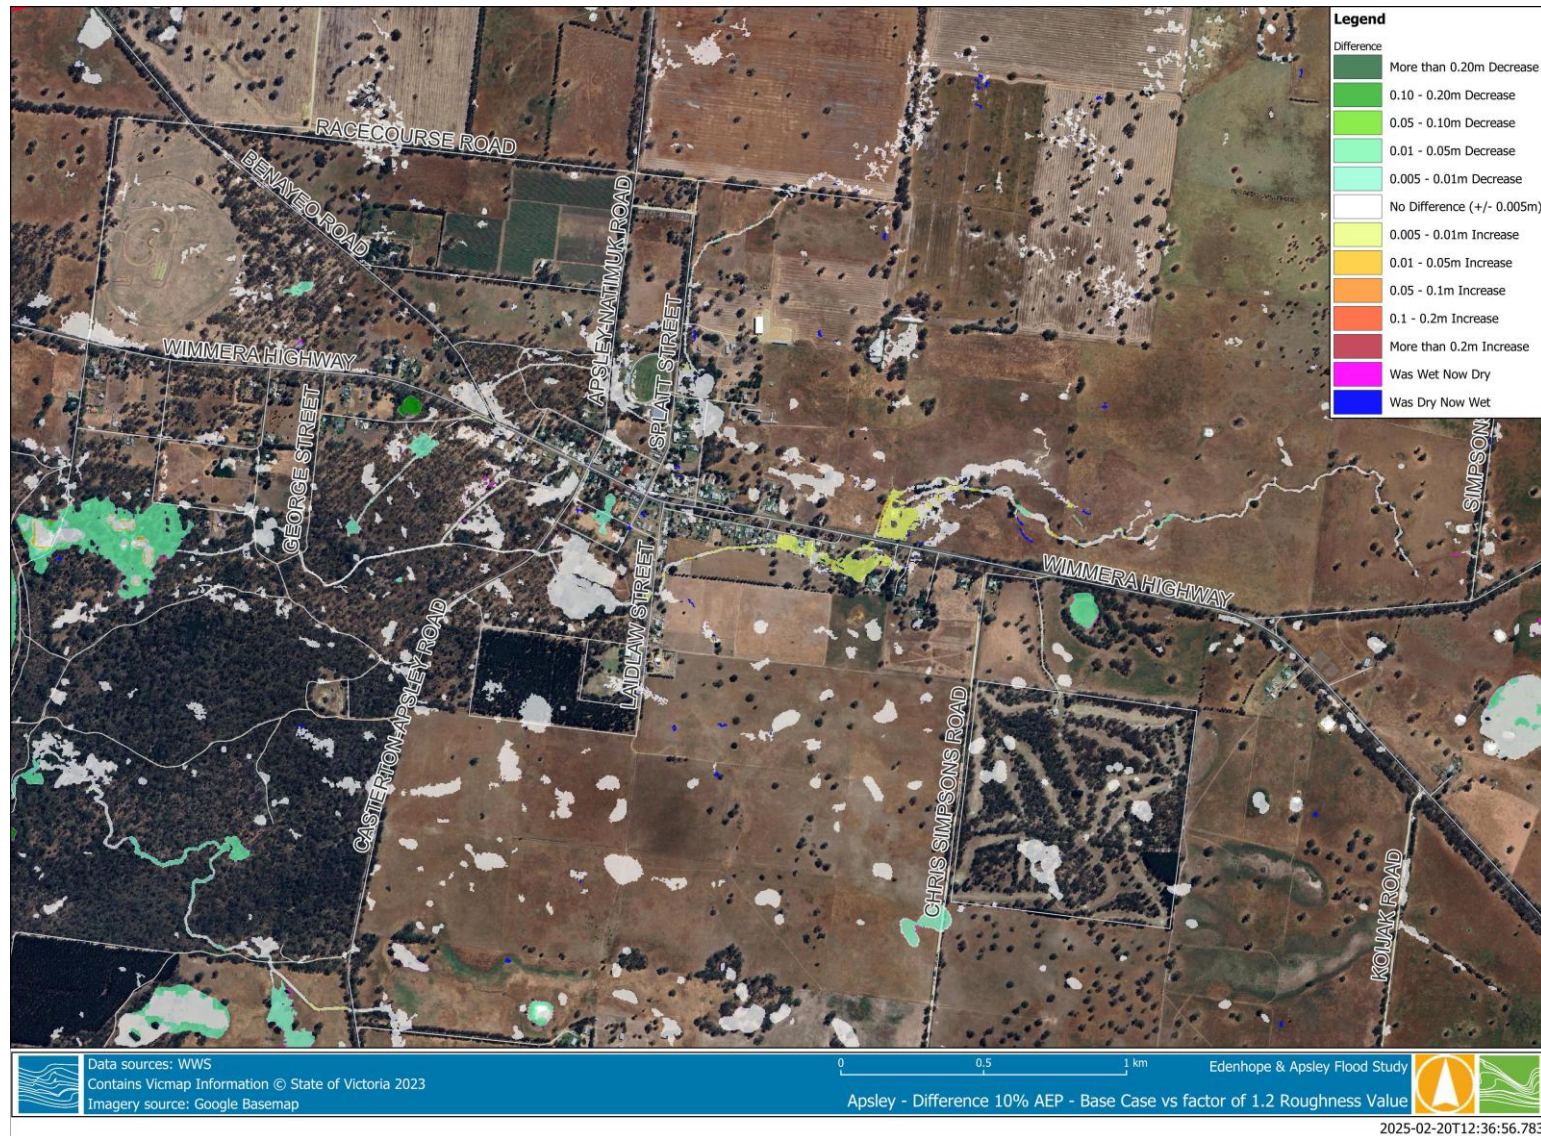


Figure 3-14 Difference Plot for 10% AEP - Base Case vs factor of 1.2 Roughness Value



3.4 Critical Storm Duration

A range of durations was modelled to determine the critical event durations across each model extent. To determine the critical duration, we undertook the following steps:

- Three temporal patterns (i.e., front-, steady-, and rear-loaded) were run for each duration between 1 hour to 24 hours. The analysed storm durations and temporal patterns for the 10% and 1% AEP events are listed in Table 2-4.
- For individual storm durations the results (flood depth) from the 3 temporal patterns were maximised. This allowed to capture sensitivity within the catchment to temporal pattern loaded.
- The median value across all maxed storm durations was extracted to identify the critical duration/s. Three critical durations were identified within the model extent for each AEP event (i.e., short, mid, long), which are listed in Table 3-1.
- The selected durations were then rerun with all ten temporal patterns and the median peak flow values were taken. The resulting median depth grid would consist of a combination of several temporal patterns based on the key catchment locations (i.e., Apsley township and upstream flow path).
- Lastly, the median depth results were then maximised to obtain the final maximised depth results with a combination of critical durations. The selected critical durations and key catchment locations are listed in Table 3-2.

For this assessment, the base parameters determined in the previous sensitivity test section were used to determine the critical durations and temporal pattern as the design storm event.

Table 3-1 Selected short, mid, long critical durations

Critical Duration	1% AEP & 10% AEP
Short	2 hours
Mid	12 hours
Long	24 hours

Table 3-2 Finalised critical durations at key catchment locations

	Critical Duration
Apsley township	2 hours
Upstream flow path	12 hours

3.5 Adopted Parameters for Design Modelling

Based on these findings, these are the parameter values we have adopted:

- Antecedent conditions – 90th percentile initial water level;
- Rainfall losses and pre-burst – 75th percentile pre-burst rainfall;
- Roughness coefficient – see Table 2-1;
- Critical durations – see Table 3-2.



4 DRAFT FLOOD MODELLING

4.1 Existing Conditions

Design flood modelling for the 10% and 1% AEP events was completed using the validated hydraulic models. Flood modelling outputs will be applied for flood emergency response improvement and planning, and flood maps will be used as guidance for future land use development.

The final flood maps for each event were created by the maximum of all the runs for each AEP event. The maximum flood extents for the 10% and 1% AEP events for the zoomed in Apsley township and zoomed out extent are shown in Figure 4-2 and Figure 4-3 respectively, and the maximum depths of both events are shown in Figure 4-4, Figure 4-5, Figure 4-8 and Figure 4-9. All gridded results were filtered to only include areas where the flood depth is >0.05 m and puddles >200m².

Flood hazard mapping was prepared in line with ARR2019 and the Australian Disaster Resilience Guideline 7-3 Flood Hazard⁴. The hazard classifications are based on the peak depth, velocity and product of depth and velocity. The classifications are shown Figure 4-1 and the flood hazard mappings for 10% and 1% AEP events are shown in Figure 4-6, Figure 4-7, Figure 4-10 and Figure 4-11.

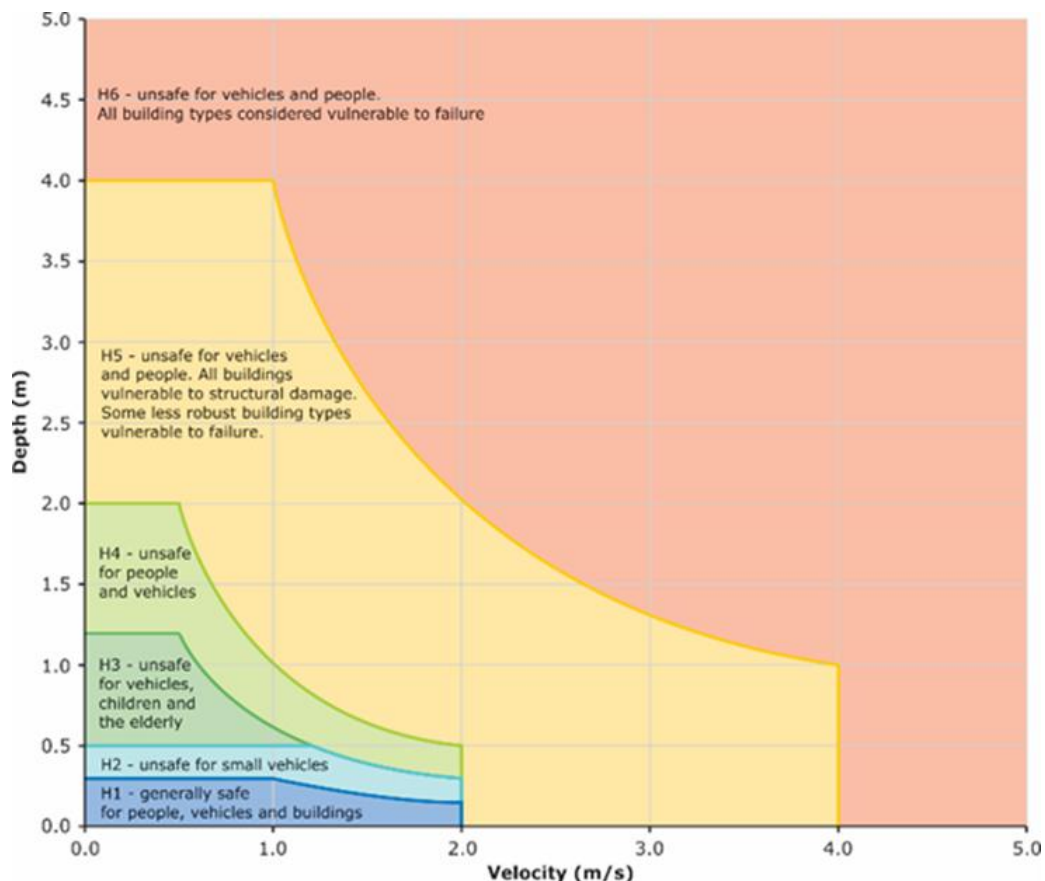


Figure 4-1 Flood hazard classifications

⁴Australian Disaster Resilience Guideline 7-3 Flood Hazard, 2017, Australian Institute Disaster Resilience

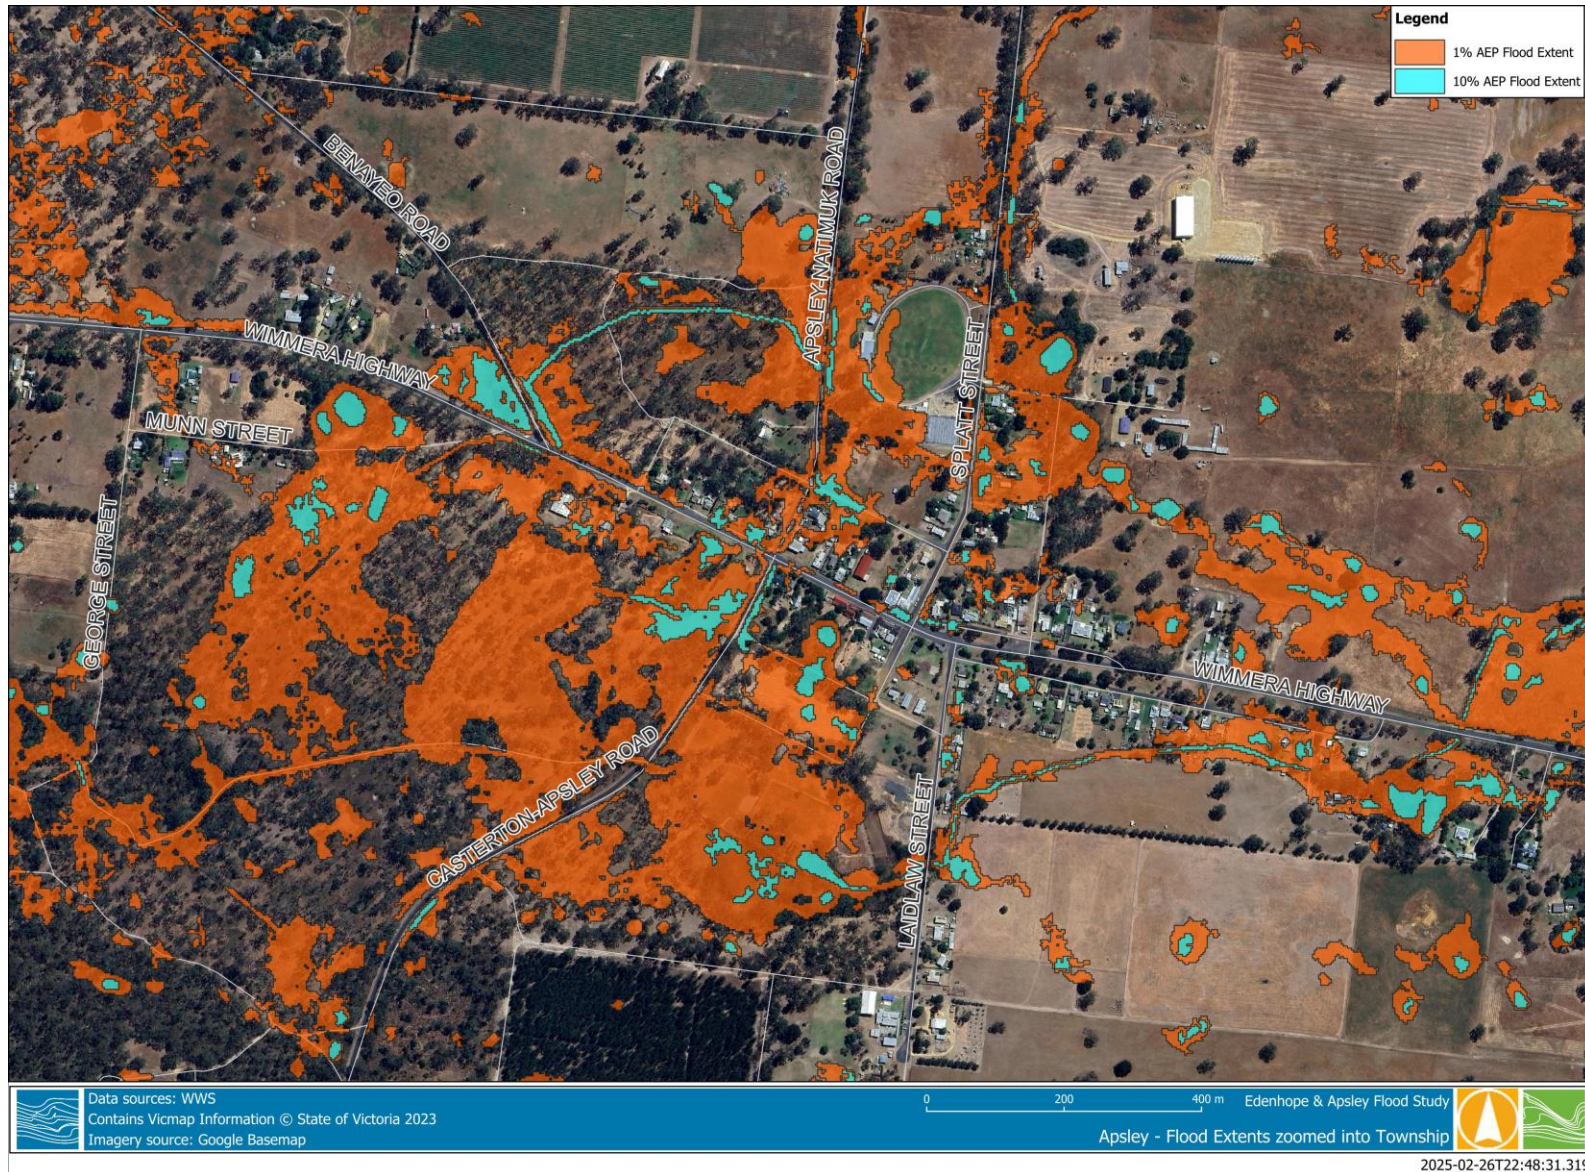


Figure 4-2 Zoomed into Apsley - 10% and 1% AEP flood events

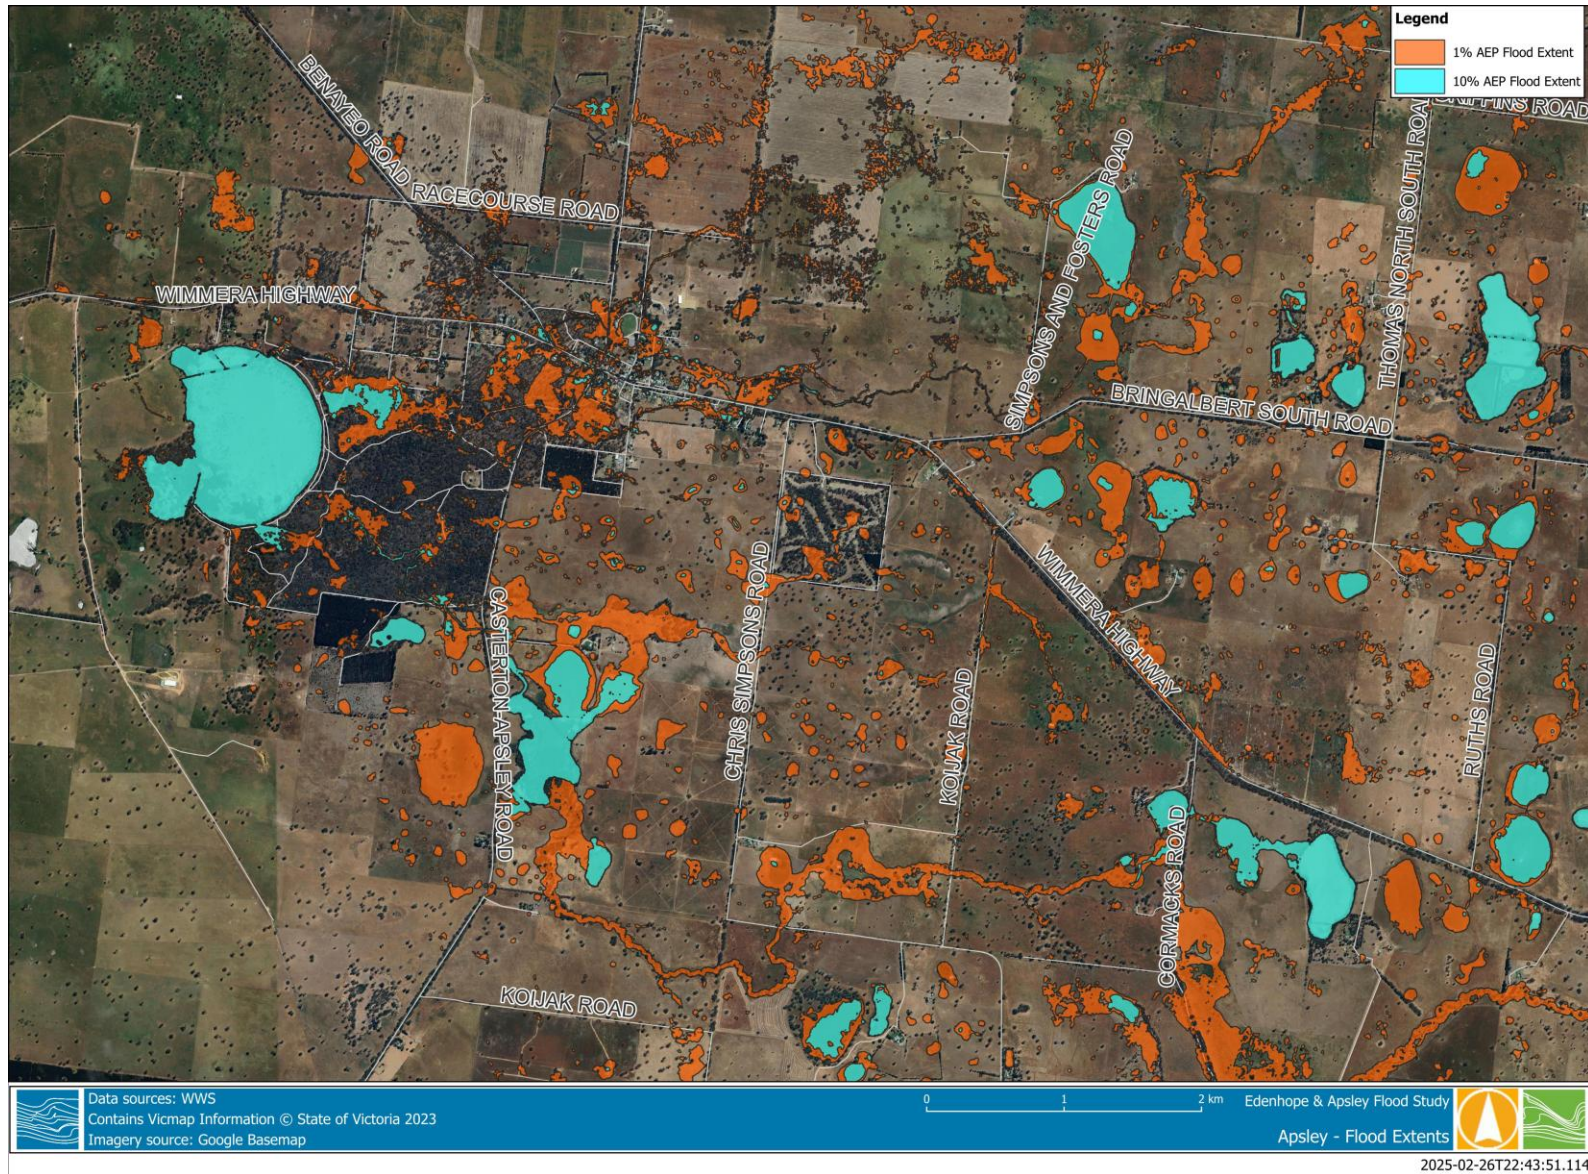


Figure 4-3 Broad extent – 10% and 1% AEP flood events

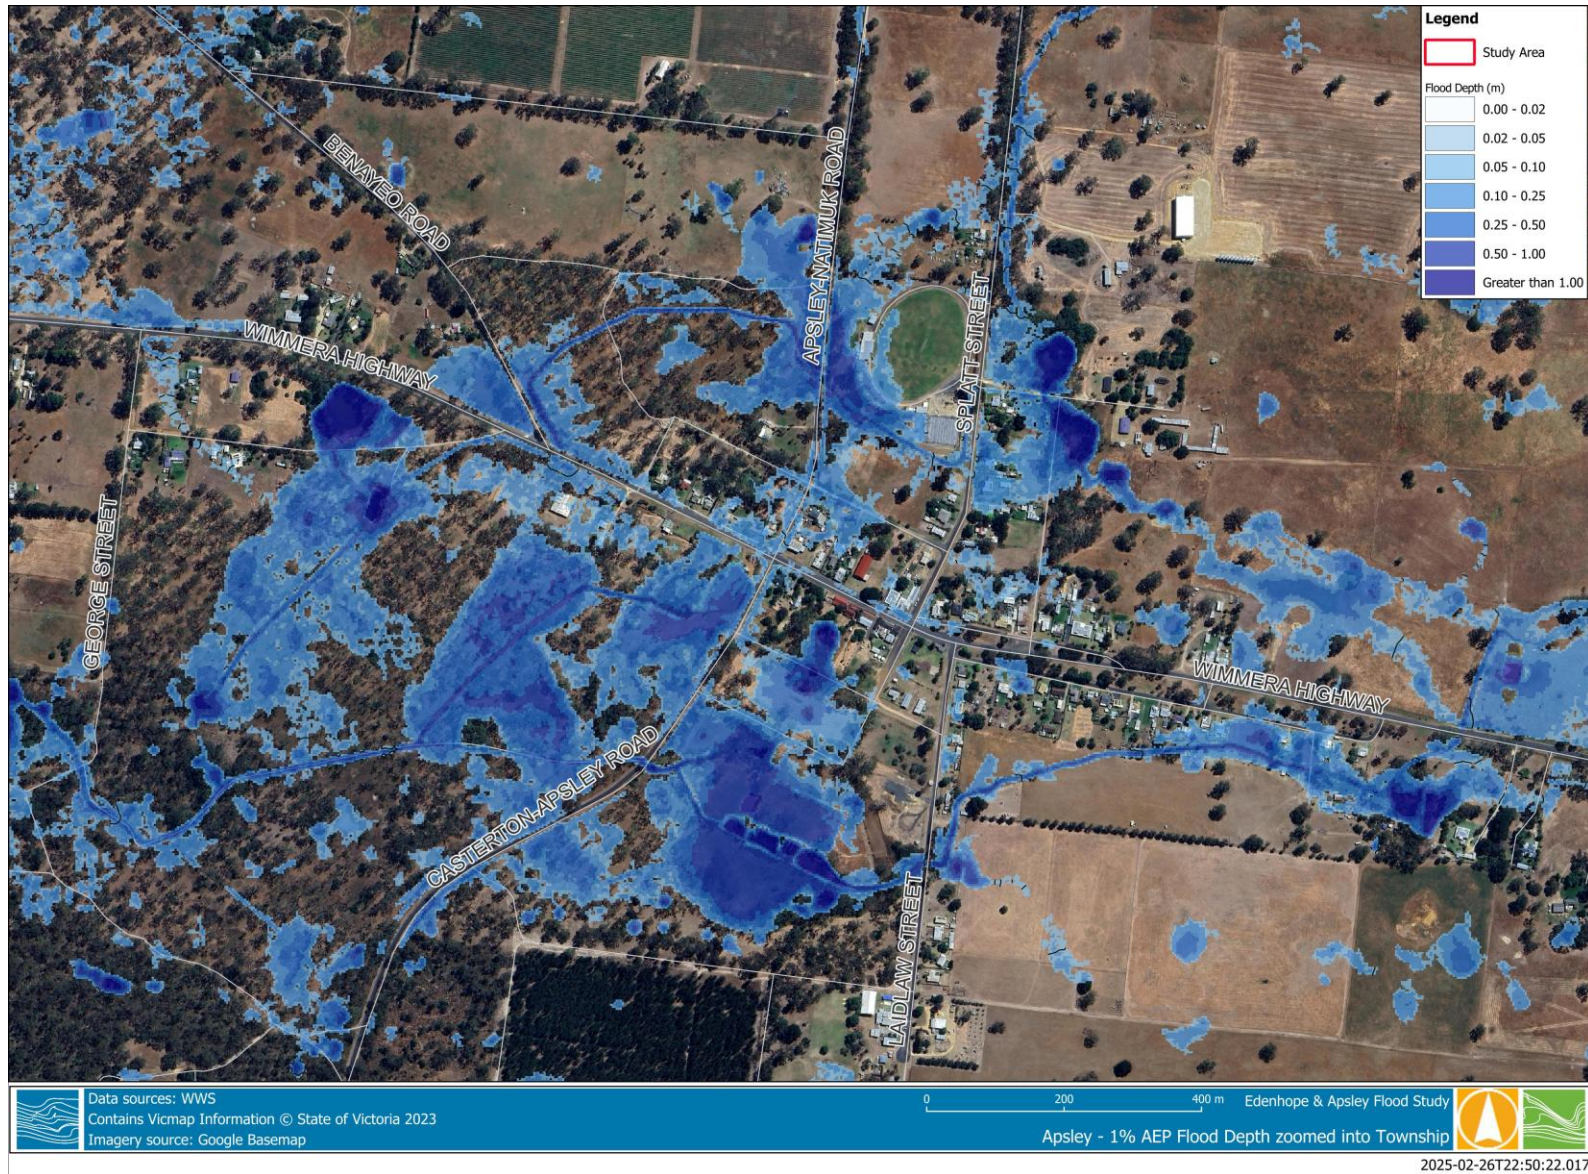


Figure 4-4 Zoomed into Apsley – 1% flood depth

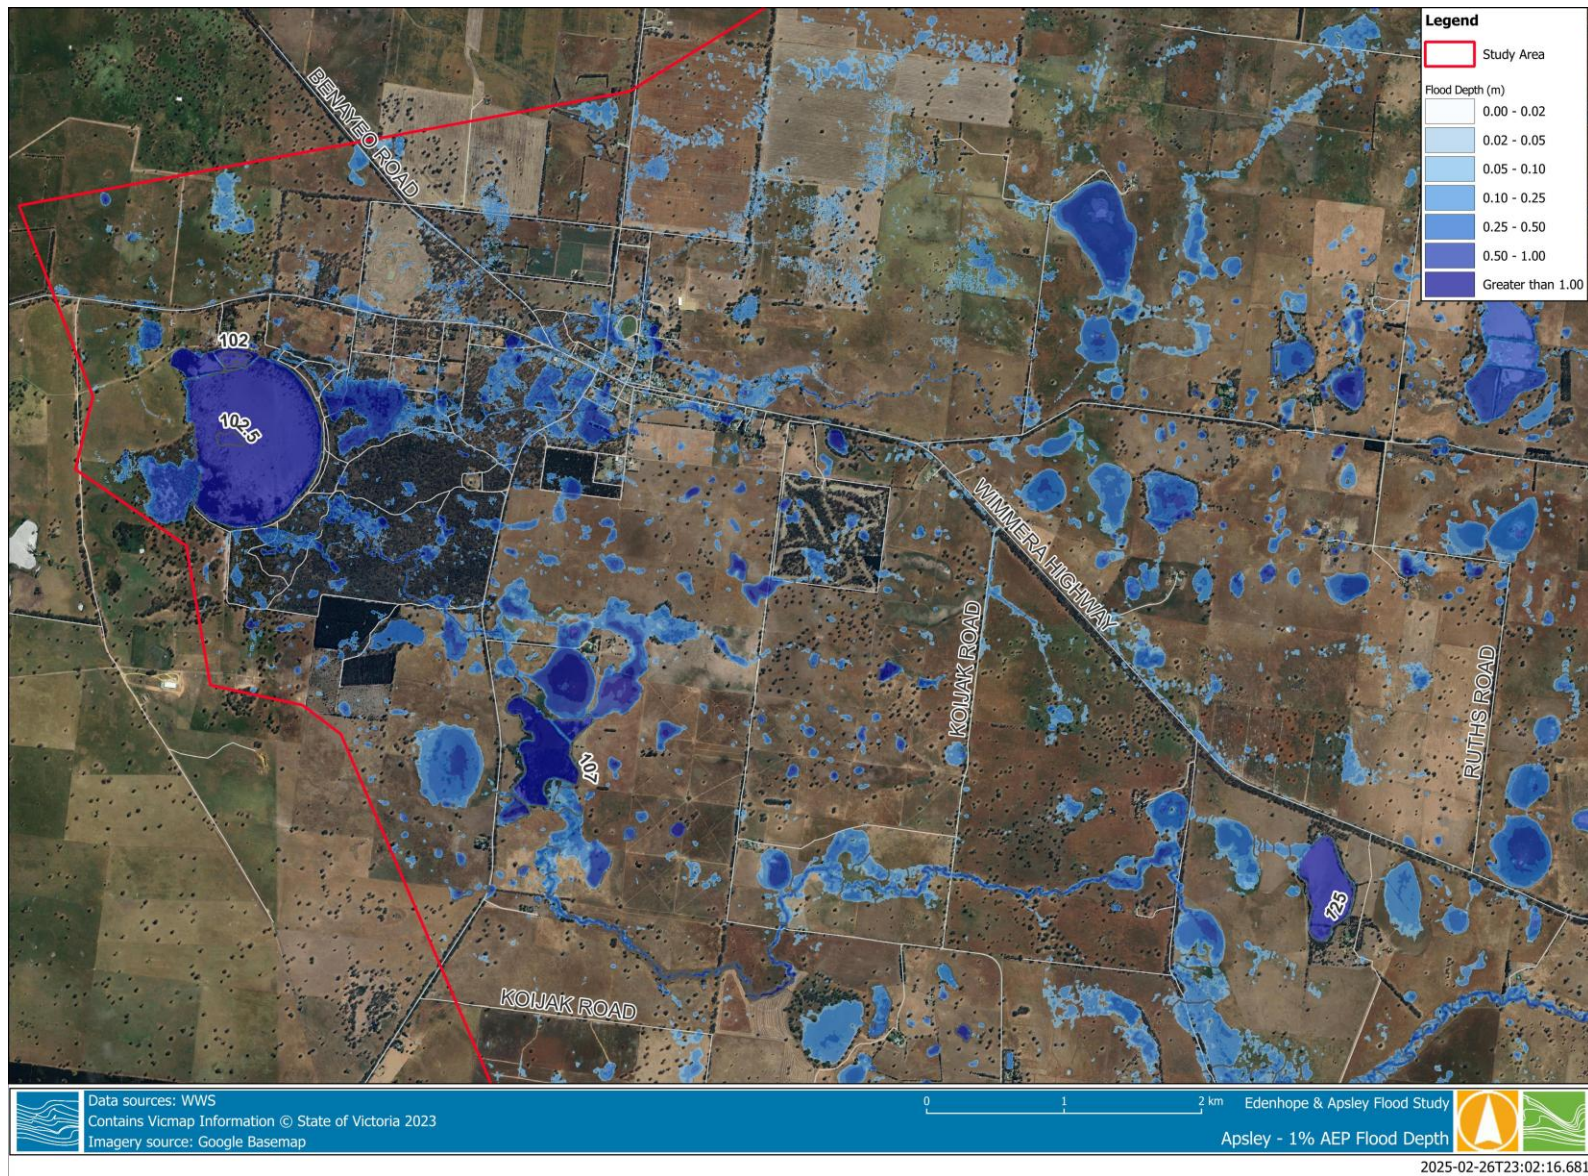


Figure 4-5 Broad extent - 1% flood depth with water surface elevation contours

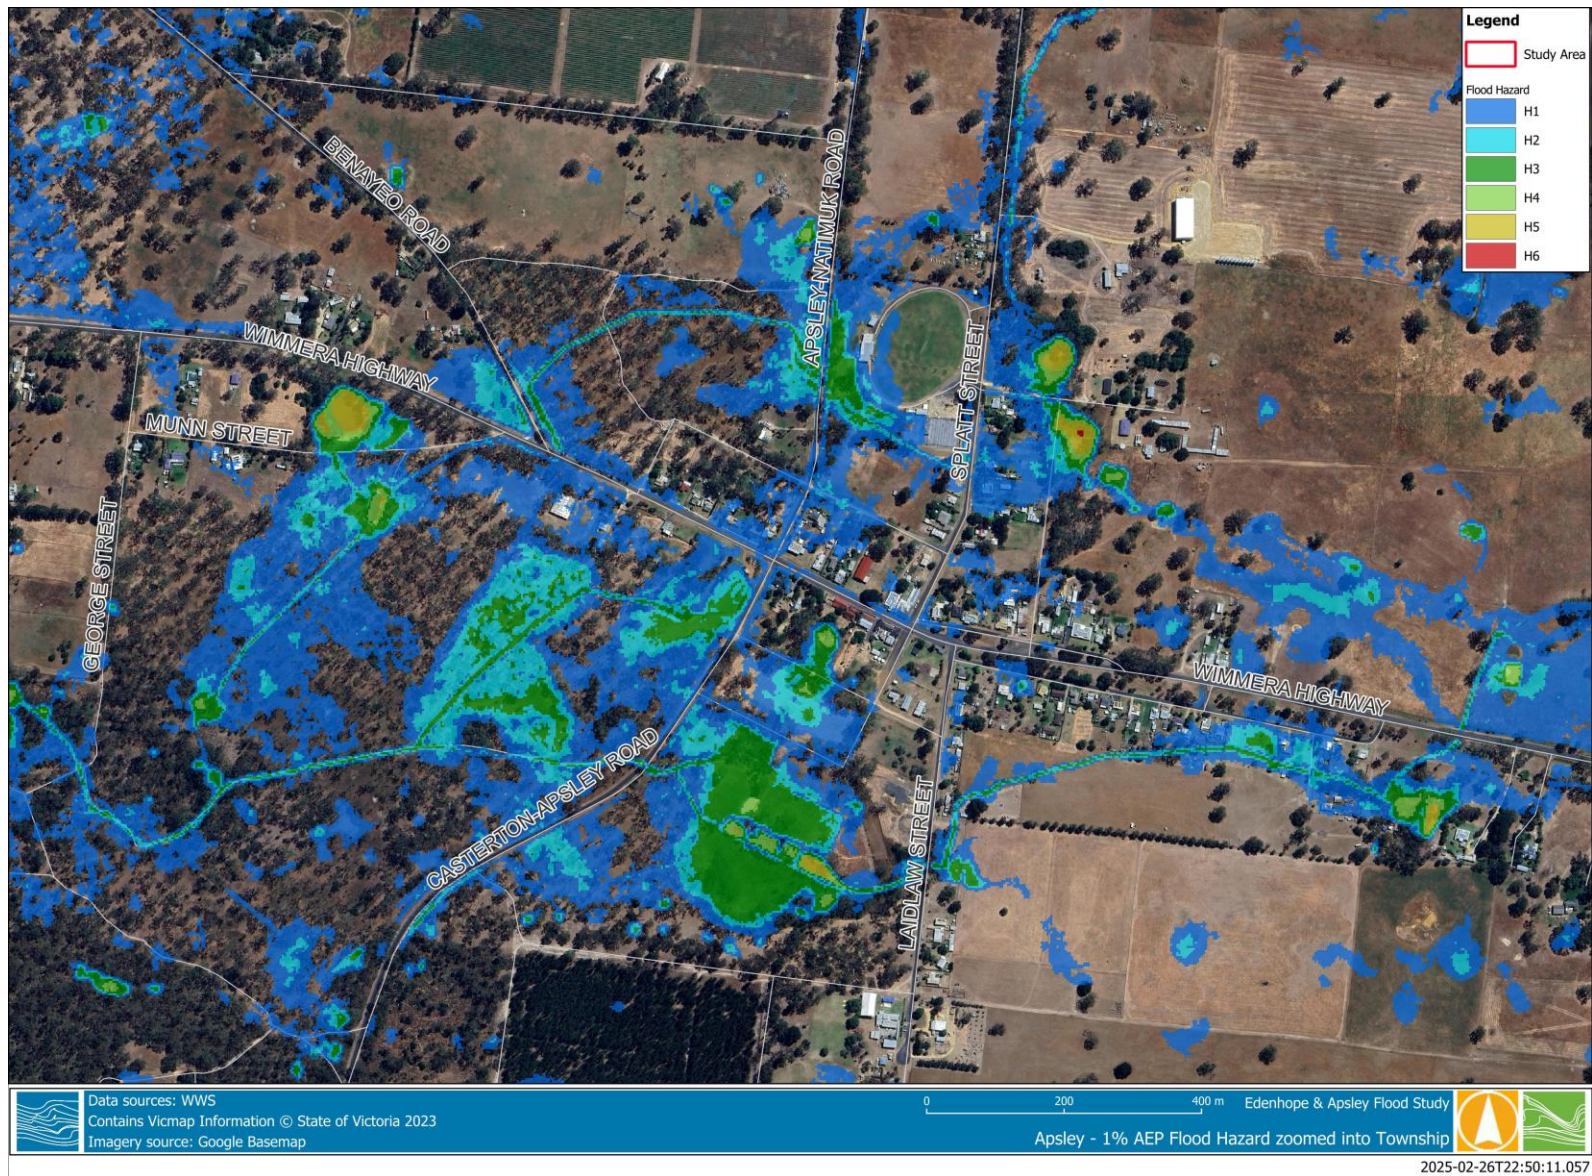


Figure 4-6 Zoomed into Apsley – 1% flood hazard

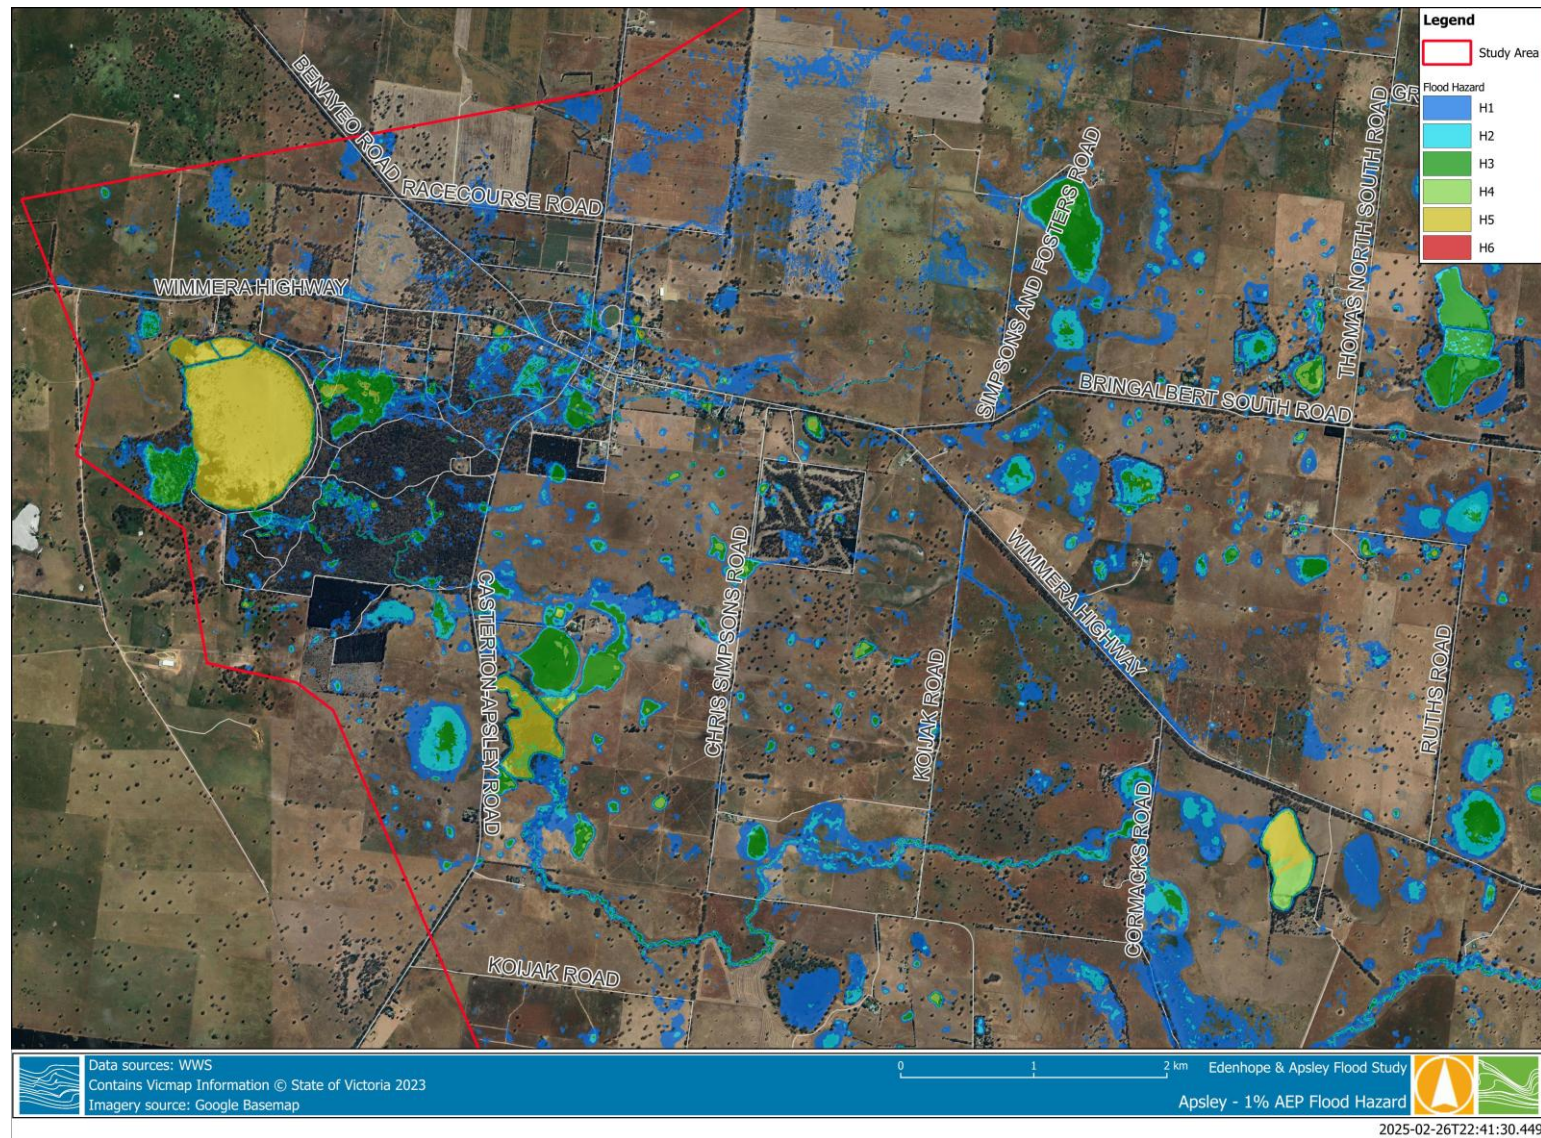


Figure 4-7 Broad extent - 1% flood hazard



Figure 4-8 Zoomed into Apsley – 10% flood depth

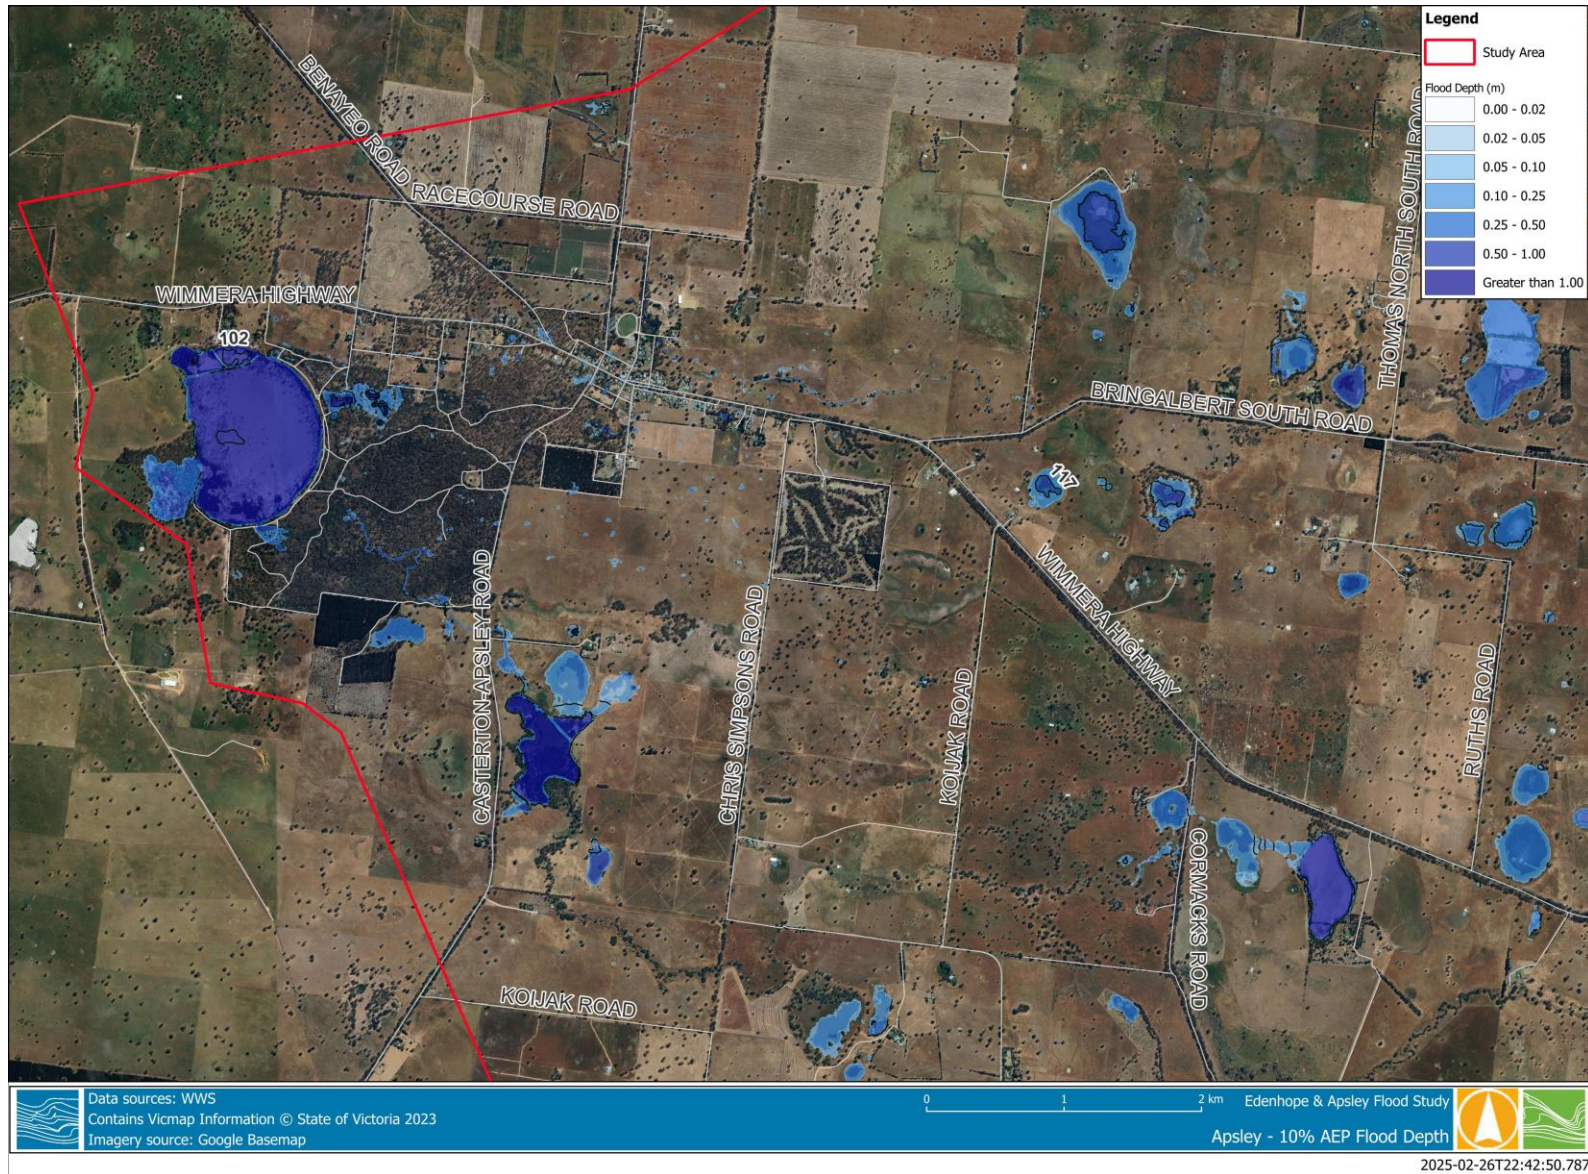


Figure 4-9 Broad extent - 10% flood depth with water surface elevation contours



Figure 4-10 Zoomed into Apsley – 10% flood hazard

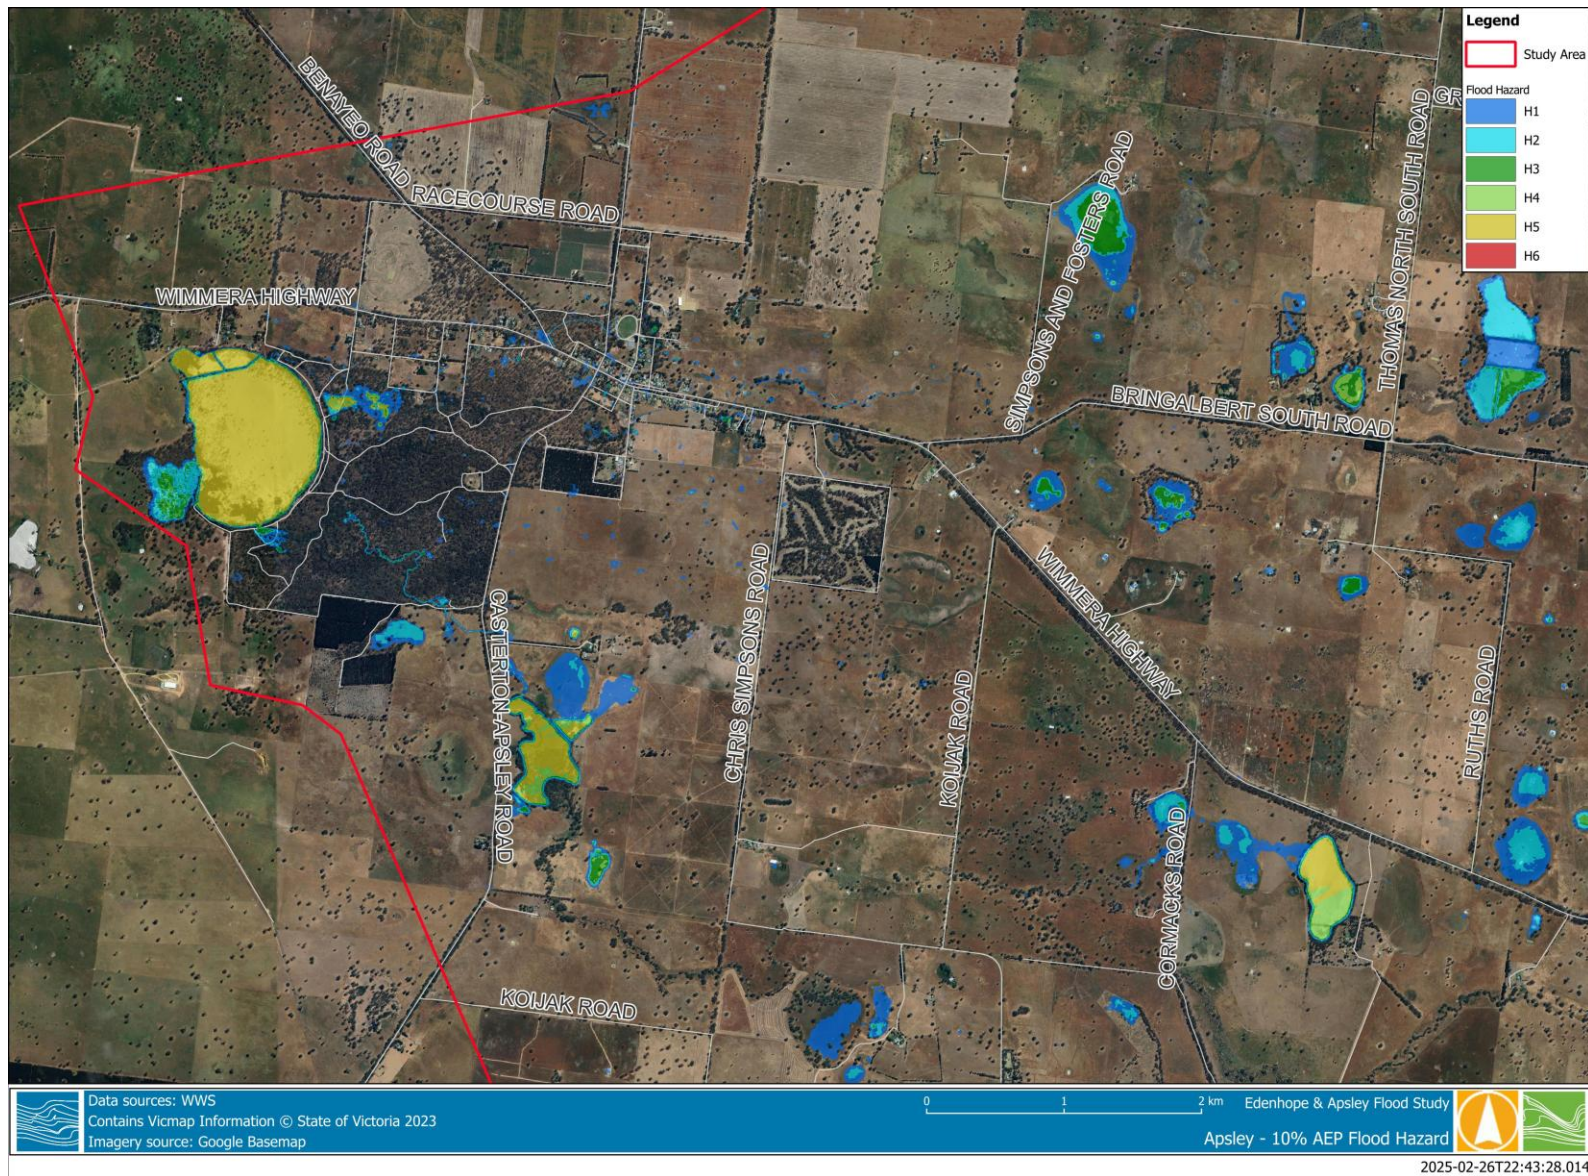


Figure 4-11 Broad extent - 10% flood hazard



5 SUMMARY AND DISCUSSION

Design modelling and sensitivity testing of the hydraulic models built as part of the Apsley Flood Investigation have been completed and detailed in this report. Once the draft flood mappings have been approved for 10% and 1% AEP events, the design modelling will be undertaken for the other events, including 20%, 5%, 2%, 0.5% and the 1% AEP events with projected climate change increased rainfall intensity under RCP4.5 and RCP8.5 for the year 2100.

The modelling shows limited sensitivity to antecedent conditions, roughness coefficient, and critical storm duration. For the 10% and 1% AEP events, initial water levels were not shown to be influential on results in the township and upstream flow paths. Roughness coefficient has a small impact on upstream flow path but not on the township, which has little influence on the overall flood extent and along flow paths within Apsley.

On the other hand, rainfall losses and pre-burst have some impacts on the overall flood level results, with the changes in water level visible at around the depression/storage. Therefore, pre-burst values that enabled a conservative flood mapping approach and were calibrated to the recent flood event were adopted as the parameter values for the design modelling.

The draft flood mapping was produced in line with industry standards and the current Australian Rainfall and Runoff guidelines. The mapping is fit for the purposes of informing land use planning in Apsley through the development of draft overlays for a future planning scheme amendment. As part of this study, model outputs will be used to assess average annual flood damages for the township, and the models will be utilised to assess potential structural mitigation options. Flood intelligence products will be developed to inform emergency management planning and response, including updated content for the Municipal Flood Emergency Management Plan.

Melbourne

15 Business Park Drive
Notting Hill VIC 3168
Telephone (03) 8526 0800

Sydney

Suite 3, Level 1, 20 Wentworth Street
Parramatta NSW 2150
Telephone (02) 9354 0300

Brisbane

Level 5, 43 Peel Street
South Brisbane QLD 4101
Telephone (07) 3105 1460

Adelaide

1/198 Greenhill Road
Eastwood SA 5063
Telephone (08) 8378 8000

Perth

Level 1, 21 Adelaide Street
Fremantle WA 6160
Telephone (08) 6555 0105

New Zealand

7/3 Empire Street
Cambridge New Zealand 3434
Telephone +64 27 777 0989

Wangaratta

First Floor, 40 Rowan Street
Wangaratta VIC 3677
Telephone (03) 5721 2650

Geelong

51 Little Fyans Street
Geelong VIC 3220
Telephone (03) 8526 0800

Wimmera

597 Joel South Road
Stawell VIC 3380
Telephone 0438 510 240

Gold Coast

Suite 37, Level 4, 194 Varsity Parade
Varsity Lakes QLD 4227
Telephone (07) 5676 7602

watertech.com.au

